

# ECE171A: Linear Control System Theory

## Lecture 9: Frequency Response

Nikolay Atanasov

[natanasov@ucsd.edu](mailto:natanasov@ucsd.edu)

**UC San Diego**

**JACOBS SCHOOL OF ENGINEERING**  
Electrical and Computer Engineering

# Outline

Frequency Response

Bode Plot

Non-Minimum Phase Systems

Polar Plot

Magnitude-Phase Plot

# Outline

Frequency Response

Bode Plot

Non-Minimum Phase Systems

Polar Plot

Magnitude-Phase Plot

## Frequency Response

- ▶ LTI ODE System:

$$\dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}u$$

$$\mathbf{y} = \mathbf{C}\mathbf{x} + \mathbf{D}u$$

$$G(s) = \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}$$

- ▶ **Frequency response:** response to a sinusoidal input  $u(t) = \sin(\omega t + \phi)$

### Frequency Response

The steady-state response of a system with transfer function  $G(s)$  to a sinusoidal input  $u(t) = \sin(\omega t + \phi)$  is a sinusoid of the **same frequency** with **amplitude scaled by  $|G(j\omega)|$**  and **phase shifted by  $\angle G(j\omega)$** :

$$y_{ss}(t) = |G(j\omega)| \sin(\omega t + \phi + \angle G(j\omega))$$

- ▶ The **magnitude**  $|G(j\omega)|$  is determined from the ratio of the amplitudes of the output versus the input sinusoids
- ▶ The **phase**  $\angle G(j\omega)$  is determined from the ratio of the time of the output versus the input zero crossings

## Frequency Response Proof

- ▶ **Euler's Formula:**  $\sin(\omega t + \phi) = \text{Im}(e^{j(\omega t + \phi)}) = \frac{e^{j(\omega t + \phi)} - e^{-j(\omega t + \phi)}}{2j}$
- ▶ **Complex conjugate of  $G(s)$ :**  $G^*(s) = |G(s)|e^{-j\angle G(s)}$
- ▶ **Conjugate symmetry of  $G(s)$ :**

$$G^*(s) = \left( \int_0^{\infty} g(t)e^{-st} dt \right)^* = \int_0^{\infty} g^*(t)e^{-s^*t} dt$$
$$\underline{\underline{g(t) \text{ is real}}} \int_0^{\infty} g(t)e^{-s^*t} dt = G(s^*)$$


- ▶ **Proof:** by superposition the steady-state response to  $u(t) = \sin(\omega t + \phi)$  is:

$$\begin{aligned} y_{ss}(t) &= \frac{1}{2j} G(j\omega) e^{j(\omega t + \phi)} - \frac{1}{2j} G(-j\omega) e^{-j(\omega t + \phi)} \\ &= \frac{1}{2j} |G(j\omega)| e^{j\angle G(j\omega)} e^{j(\omega t + \phi)} - \frac{1}{2j} |G(j\omega)| e^{-j\angle G(j\omega)} e^{-j(\omega t + \phi)} \\ &= |G(j\omega)| \sin(\omega t + \phi + \angle G(j\omega)) \end{aligned}$$


## Empirical Transfer Function Determination

► The frequency response can be obtained empirically by applying a sinusoidal test signal at various frequencies and recording the magnitude and phase of the response. This can be used to identify the system's transfer function.

1. Apply a sinusoidal signal at a fixed frequency  $\omega$
2. Measure response amplitude ratio and phase lag at steady state
3. Repeat as  $\omega$  varies from 0 to  $\infty$



(a) Time domain simulations

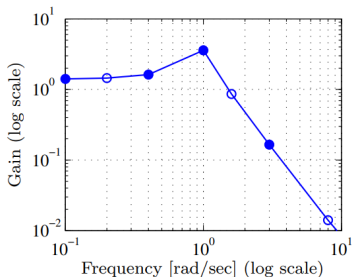

(b) Frequency response

Figure: Gain computed by measuring system response to individual sinusoid inputs

## Frequency Domain Plots

- ▶ Plotting the magnitude and phase of the transfer function  $G(j\omega)$  versus the input frequency  $\omega$  provides insight about the behavior of a linear control system
- ▶ The following frequency-domain plots of the transfer function are used:
  - ▶ **Bode plot:** plot of magnitude  $20 \log_{10} |G(j\omega)|$  in decibels (dB) and phase  $\angle G(j\omega)$  in degrees versus  $\log_{10} \omega$  as  $\omega$  varies from 0 to  $\infty$
  - ▶ **Polar plot:** plot of  $\text{Im}(G(j\omega))$  versus  $\text{Re}(G(j\omega))$  as  $\omega$  varies from 0 to  $\infty$
  - ▶ **Magnitude-phase plot:** plot of magnitude  $20 \log_{10} |G(j\omega)|$  in decibels (dB) versus phase  $\angle G(j\omega)$  in degrees as  $\omega$  varies from 0 to  $\infty$

## Decibel Units

- ▶ **Bel:** relative measurement unit of log-ratio of measured power  $P$  to reference power  $P_0$

$$\text{Log-power ratio} = \log_{10} \left( \frac{P}{P_0} \right) \text{ Bels}$$

- ▶ **Decibel:** ten Bels:

$$\text{Log-power ratio} = 10 \log_{10} \left( \frac{P}{P_0} \right) \text{ dB}$$

- ▶ The **power spectral density** of  $y(t)$  is the Fourier transform  $S_{yy}(j\omega)$  of the autocorrelation function
- ▶ The input-output power spectral density relationship for an LTI system with input  $U(s)$ , transfer function  $G(s)$ , and output  $Y(s)$  is:

$$S_{yy}(j\omega) = |Y(j\omega)|^2 = |G(j\omega)|^2 |U(j\omega)|^2 = |G(j\omega)|^2 S_{uu}(j\omega)$$

- ▶ The log-power ratio at  $\omega$  in dB is:

$$10 \log_{10} \left( \frac{S_{yy}(j\omega)}{S_{uu}(j\omega)} \right) = 10 \log_{10} |G(j\omega)|^2 = 20 \log_{10} |G(j\omega)|$$



# Outline

Frequency Response

Bode Plot

Non-Minimum Phase Systems

Polar Plot

Magnitude-Phase Plot

## Bode Plot

- ▶ **Hendrik Bode**: a pioneer of modern control theory and electronic telecommunications
- ▶ **Bode plot**: represents the frequency response of a linear system with transfer function  $G(s)$  by two plots:
  - ▶ Plot of **magnitude**  $20 \log_{10} |G(j\omega)|$  in dB versus  $\log_{10} \omega$
  - ▶ Plot of **phase**  $\angle G(j\omega)$  in degrees versus  $\log_{10} \omega$
- ▶ Logarithmic scale is used for the input frequency  $\omega$  to capture the system behavior over a wide frequency range
- ▶ The log-scale intervals are known as decades (base 10) or octaves (base 2):
  - ▶ The number of **decades** between  $\omega_1$  and  $\omega_2$  is  $\log_{10} \frac{\omega_2}{\omega_1}$
  - ▶ The number of **octaves** between  $\omega_1$  and  $\omega_2$  is  $\log_2 \frac{\omega_2}{\omega_1}$
  - ▶ There are  $\log_2(10) \approx 3.32$  octaves in one decade
  - ▶ A slope of 20 dB/decade is the same as  $\frac{20 \text{ dB/decade}}{\log_2(10) \text{ octave/decade}} \approx 6 \text{ dB/octave}$



H. Bode

## Transfer Function Magnitude and Phase

- ▶ The magnitude and phase of  $G(s)$  are needed to draw a Bode plot

- ▶ Consider a transfer function  $G(s) = \frac{b_1(s)b_2(s)}{a_1(s)a_2(s)}$

- ▶ **Magnitude** of  $G(s)$  in log-scale is the sum/difference of magnitudes corresponding to terms in the numerator/denominator:

$$\log |G(s)| = \log |b_1(s)| + \log |b_2(s)| - \log |a_1(s)| - \log |a_2(s)|$$

- ▶ **Phase** of  $G(s)$  is the sum/difference of phases corresponding to terms in the numerator/denominator:

$$\angle G(s) = \angle b_1(s) + \angle b_2(s) - \angle a_1(s) - \angle a_2(s).$$

## Transfer Function in Bode Form

- ▶ Instead of computing the magnitude and phase of  $G(s)$  directly, it is preferable to obtain rules for drawing Bode plots of individual terms
- ▶ **Transfer function in Bode form:** a transfer function with  $m_1$  real zeros,  $m_2$  complex conjugate zero pairs,  $n_0$  poles at the origin,  $n_1$  real poles, and  $n_2$  complex conjugate pole pairs:

$$G(s) = \kappa \frac{\prod_{i=1}^{m_1} \left( \frac{s}{z_i} + 1 \right) \prod_{l=1}^{m_2} \left( \left( \frac{s}{\omega_{n_l}} \right)^2 + 2\zeta_l \left( \frac{s}{\omega_{n_l}} \right) + 1 \right)}{s^{n_0} \prod_{i=1}^{n_1} \left( \frac{s}{p_i} + 1 \right) \prod_{k=1}^{n_2} \left( \left( \frac{s}{\omega_{n_k}} \right)^2 + 2\zeta_k \left( \frac{s}{\omega_{n_k}} \right) + 1 \right)}$$



- ▶ A transfer function may contain only four kinds of factors:
  - ▶ Constant term:  $\kappa$
  - ▶ Poles  $s^{-q}$  or zeros  $s^q$  at the origin
  - ▶ Real poles  $\left( \frac{s}{p} + 1 \right)^{-1}$  or zeros  $\left( \frac{s}{z} + 1 \right)$
  - ▶ Complex conjugate poles or zeros:  $\left( \left( \frac{s}{\omega_n} \right)^2 + 2\zeta \left( \frac{s}{\omega_n} \right) + 1 \right)^{\pm 1}$
- ▶ If we determine the magnitude and phase plots for these four factors, we can add them together graphically to obtain a Bode plot for any transfer function

## Bode Plot for a Constant Term $\kappa$

► **Magnitude:**  $20 \log |\kappa|$

► **Phase:**  $\angle \kappa = \begin{cases} 0^\circ & \text{if } \kappa > 0 \\ 180^\circ & \text{if } \kappa < 0 \end{cases}$

► **Example:** Bode plot for  $G(s) = \frac{1}{10}$  and  $G(s) = -10$

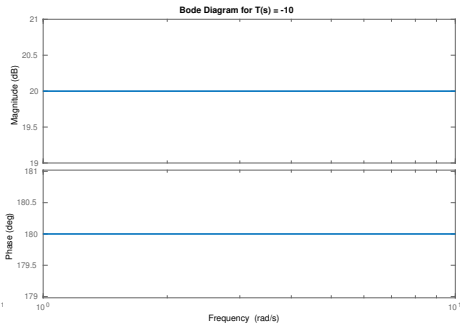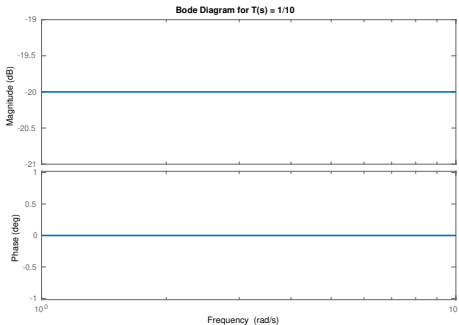



## Bode Plot for Pole or Zero at the Origin: $s^q$

- **Magnitude:** straight line (log scale) through the origin with slope  $20q$ :

$$20 \log |(j\omega)^q| = 20q \log |\omega|$$

- **Phase:** a horizontal line at  $q90^\circ$ :

$$\underline{\angle(j\omega)^q} = q \underline{\angle(j\omega)} = q90^\circ$$

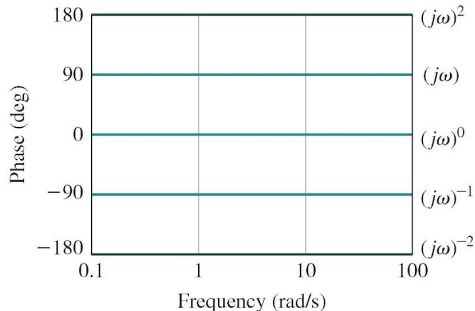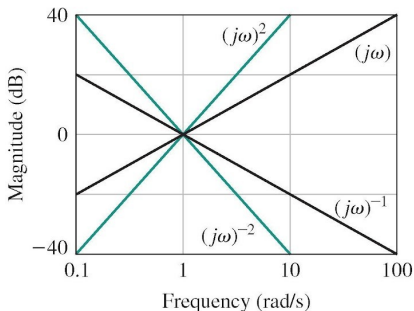

## Bode Plot for Real Zero ( $\frac{s}{z} + 1$ )

► **Magnitude:**  $20 \log \left| j\frac{\omega}{z} + 1 \right| = 20 \log \sqrt{1 + \left(\frac{\omega}{z}\right)^2}$

► **Phase:**  $\angle \left( j\frac{\omega}{z} + 1 \right) = \tan^{-1} \frac{\omega}{z}$

► Extreme  $\omega$  values:

► **Case 1:**  $\omega \ll z$ : horizontal line at 0:

$$20 \log \left| j\frac{\omega}{z} + 1 \right| \approx 0 \qquad \angle \left( j\frac{\omega}{z} + 1 \right) \approx 0^\circ$$

► **Case 2:**  $\omega \gg z$ : log-scale line of slope 20 going through 0 when  $\omega = z$ :

$$20 \log \left| j\frac{\omega}{z} + 1 \right| \approx 20 \log \frac{1}{z} + 20 \log \omega \qquad \angle \left( j\frac{\omega}{z} + 1 \right) \approx 90^\circ$$

► **Case 3:**  $\omega = z$  (**corner frequency**):

$$20 \log \left| j\frac{\omega}{z} + 1 \right| \approx 3dB \qquad \angle \left( j\frac{\omega}{z} + 1 \right) = 45^\circ$$

## Bode Plot for Real Pole $\left(\frac{s}{p} + 1\right)^{-1}$

▶ **Magnitude:**  $20 \log \left| \left(j\frac{\omega}{p} + 1\right)^{-1} \right| = -20 \log \sqrt{1 + \left(\frac{\omega}{p}\right)^2}$

▶ **Phase:**  $\angle \left(j\frac{\omega}{p} + 1\right)^{-1} = -\tan^{-1} \frac{\omega}{p}$

▶ Extreme  $\omega$  values:

▶ **Case 1:**  $\omega \ll p$ : horizontal line at 0:

$$-20 \log \left| j\frac{\omega}{p} + 1 \right| \approx 0 \qquad \angle \left(j\frac{\omega}{p} + 1\right)^{-1} \approx 0^\circ$$

▶ **Case 2:**  $\omega \gg p$ : log-scale line of slope  $-20$  going through 0 when  $\omega = p$ :

$$-20 \log \left| j\frac{\omega}{p} + 1 \right| \approx -20 \log \frac{1}{p} - 20 \log \omega \qquad \angle \left(j\frac{\omega}{p} + 1\right)^{-1} \approx -90^\circ$$


▶ **Case 3:**  $\omega = p$  (corner frequency):

$$-20 \log \left| j\frac{\omega}{p} + 1 \right| \approx -3dB \qquad \angle \left(j\frac{\omega}{p} + 1\right)^{-1} \approx -45^\circ$$



## Bode Plot for Real Pole $\left(\frac{s}{p} + 1\right)^{-1}$

- ▶ A real pole behaves like a constant at low frequencies and like an integrator at high frequencies

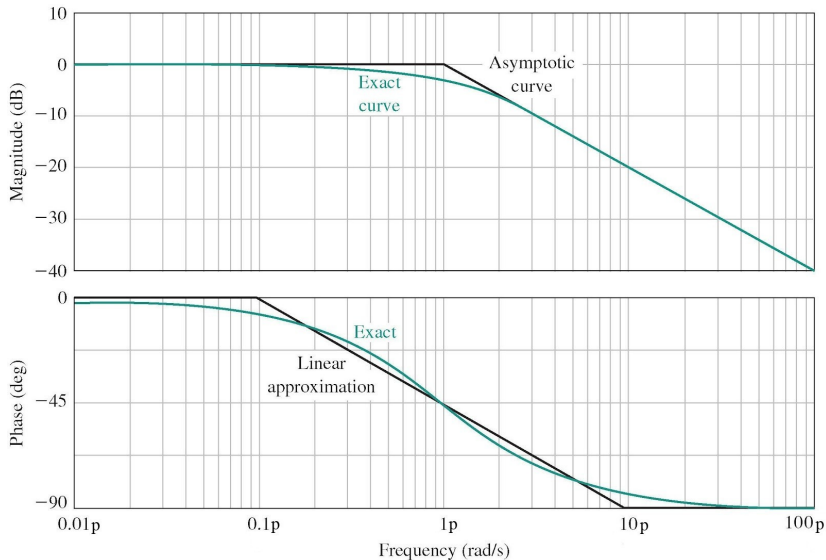

## Bode Plot Example 1

▶ Draw a Bode plot for  $G(s) = 10 \frac{s+10}{(s+1)(s+100)} = \frac{(s/10+1)}{(s+1)(s/100+1)}$

Step 1 : Find frequency break points (poles and zeros): 1, 10, 100


Step 2 : Calculate  $|G(0)|$  and  $\angle G(0)$  to determine the starting points

Step 3 : Sketch the Bode plot by the rules:

- ▶ **Magnitude increases with a zero:** the slope is +20 dB/decade for a real zero
- ▶ **Magnitude decreases with a pole:** the slope is -20 dB/decade for a real pole
- ▶ **Phases increases with a zero:** by  $+90^\circ$  starting from  $z/10$  and ending at  $10z$
- ▶ **Phases decreases with a pole:** by  $-90^\circ$  starting from  $p/10$  and ending at  $10p$

## Bode Plot Example 1

- ▶ Draw a Bode plot for  $G(s) = 10 \frac{s+10}{(s+1)(s+100)} = \frac{(s/10+1)}{(s+1)(s/100+1)}$

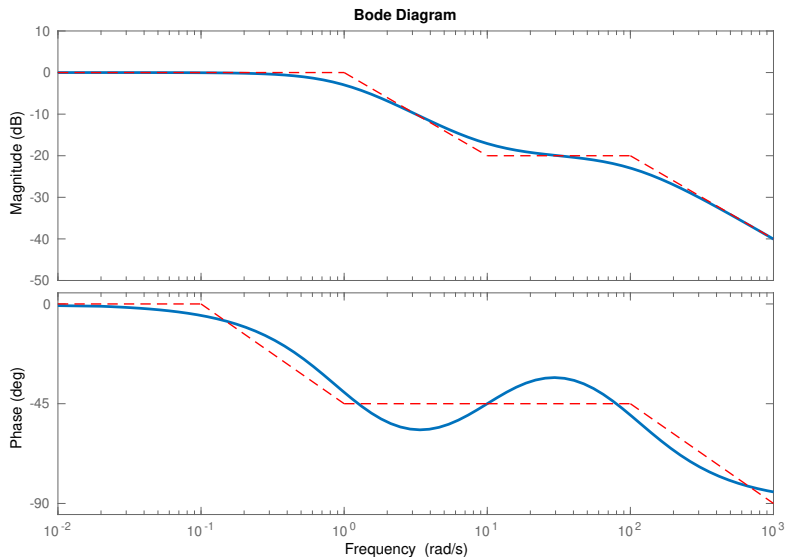

## Bode Plot for Complex Conjugate Zeros

▶ Consider  $G(s) = \left( \left( \frac{s}{\omega_n} \right)^2 + 2\zeta \left( \frac{s}{\omega_n} \right) + 1 \right)$

▶ **Magnitude:**

$$|G(j\omega)| = \left| -\frac{\omega^2}{\omega_n^2} + 2\zeta \frac{\omega}{\omega_n} j + 1 \right| = \sqrt{\left( 1 - \left( \frac{\omega}{\omega_n} \right)^2 \right)^2 + 4\zeta^2 \left( \frac{\omega}{\omega_n} \right)^2}$$

▶ **Phase:**

$$\angle G(j\omega) = \angle \left( -\frac{\omega^2}{\omega_n^2} + 2\zeta \frac{\omega}{\omega_n} j + 1 \right) = \tan^{-1} \left( \frac{2\zeta \left( \frac{\omega}{\omega_n} \right)}{1 - \left( \frac{\omega}{\omega_n} \right)^2} \right)$$

## Bode Plot for Complex Conjugate Zeros

$$|G(j\omega)| = \sqrt{\left(1 - \left(\frac{\omega}{\omega_n}\right)^2\right)^2 + 4\zeta^2 \left(\frac{\omega}{\omega_n}\right)^2} \quad \angle G(j\omega) = \tan^{-1} \left( \frac{2\zeta \left(\frac{\omega}{\omega_n}\right)}{1 - \left(\frac{\omega}{\omega_n}\right)^2} \right)$$

► Extreme  $\omega$  values:

► **Case 1:**  $\omega \ll \omega_n$ : horizontal line at 0:

$$20 \log |G(j\omega)| \approx 0$$

$$\angle G(j\omega) \approx 0^\circ$$

► **Case 2:**  $\omega \gg \omega_n$ : log-scale line of slope 40 going through 0 when  $\omega = \omega_n$ :

$$20 \log |G(j\omega)| \approx 20 \log \sqrt{\left(\frac{\omega}{\omega_n}\right)^4} = 40 \log \omega - 40 \log \omega_n \quad \angle G(j\omega) \approx 180^\circ$$

► **Case 3:**  $\omega = \omega_n$ :

$$20 \log |G(j\omega)| = 20 \log(2\zeta)$$

$$\angle G(j\omega) = 90^\circ$$

## Bode Plot for Complex Conjugate Poles

- ▶ Consider  $G(s) = \left( \left( \frac{s}{\omega_n} \right)^2 + 2\zeta \left( \frac{s}{\omega_n} \right) + 1 \right)^{-1}$

$$|G(j\omega)| = \frac{1}{\sqrt{\left(1 - \left(\frac{\omega}{\omega_n}\right)^2\right)^2 + 4\zeta^2 \left(\frac{\omega}{\omega_n}\right)^2}} \quad \angle G(j\omega) = -\tan^{-1} \left( \frac{2\zeta \left(\frac{\omega}{\omega_n}\right)}{1 - \left(\frac{\omega}{\omega_n}\right)^2} \right)$$

- ▶ Extreme  $\omega$  values:

- ▶ **Case 1:**  $\omega \ll \omega_n$ : horizontal line at 0:

$$20 \log |G(j\omega)| \approx 0 \quad \angle G(j\omega) \approx 0^\circ$$


- ▶ **Case 2:**  $\omega \gg \omega_n$ : log-scale line of slope  $-40$  going through 0 when  $\omega = \omega_n$

$$20 \log |G(j\omega)| \approx -20 \log \sqrt{\left(\frac{\omega}{\omega_n}\right)^4} = -40 \log \omega + 40 \log \omega_n \quad \angle G(j\omega) \approx -180^\circ$$

- ▶ **Case 3:**  $\omega = \omega_n$ :

$$20 \log |G(j\omega)| = -20 \log(2\zeta) \quad \angle G(j\omega) = -90^\circ$$

## Bode Plot for Complex Conjugate Poles




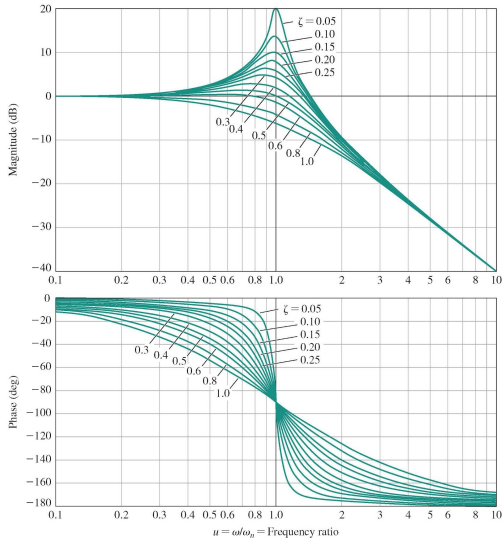


$$G(s) = \frac{1}{\left(\frac{s}{\omega_n}\right)^2 + 2\zeta\left(\frac{s}{\omega_n}\right) + 1}$$

- ▶ **Resonant frequency:** the largest gain  $\max_{\omega} |G(j\omega)| \approx \frac{1}{2\zeta}$  occurs at  $\omega \approx \omega_n$
- ▶ The asymptotic approximation is poor near  $\omega = \omega_n$  and the magnitude and phase depend on  $\zeta$

# Bode Plot Approximations for Basic Transfer Function Terms

**Table 8.1 Asymptotic Curves for Basic Terms of a Transfer Function**

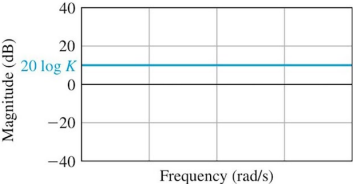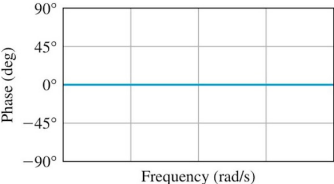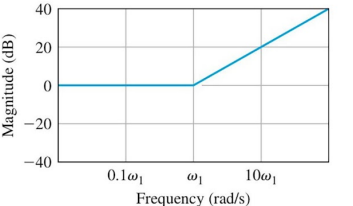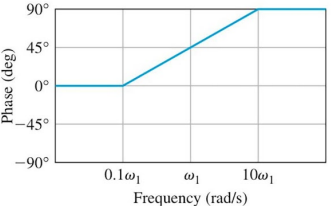Term	Magnitude $20 \log_{10} G(j\omega) $	Phase $\phi(\omega)$
1. Gain, $G(j\omega) = K$		
2. Zero, $G(j\omega) = 1 + j\omega/\omega_1$		

Copyright ©2017 Pearson Education, All Rights Reserved



# Bode Plot Approximations for Basic Transfer Function Terms



**Table 8.1 Asymptotic Curves for Basic Terms of a Transfer Function**

Term	Magnitude $20 \log_{10} G(j\omega) $	Phase $\phi(\omega)$
3. Pole, $G(j\omega) = (1 + j\omega/\omega_1)^{-1}$		
4. Pole at the origin, $G(j\omega) = 1/j\omega$		

Copyright © 2017 Pearson Education, All Rights Reserved

# Bode Plot Approximations for Basic Transfer Function Terms

**Table 8.1 Asymptotic Curves for Basic Terms of a Transfer Function**

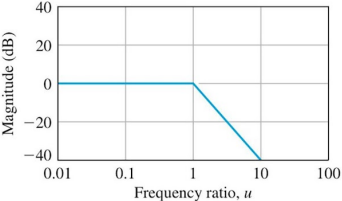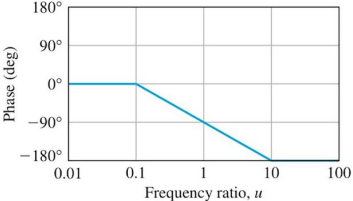Term	Magnitude $20 \log_{10} G(j\omega) $	Phase $\phi(\omega)$
5. Two complex poles, $0.1 < \zeta < 1$ , $G(j\omega) = (1 + j2\zeta u - u^2)^{-1}$ $u = \omega/\omega_n$	 <p>Magnitude (dB)</p> <p>Frequency ratio, <math>u</math></p>	 <p>Phase (deg)</p> <p>Frequency ratio, <math>u</math></p>

Copyright ©2017 Pearson Education, All Rights Reserved

## LTI Systems as Filters

- ▶ A Bode plot allows viewing a stable linear system as a filter that changes input signals depending on the frequency range

- ▶ **Low-pass filter:**

$$G(s) = \frac{\omega_0^2}{s^2 + 2\zeta\omega_0s + \omega_0^2}$$


- ▶ **Band-pass filter:**

$$G(s) = \frac{2\zeta\omega_0s}{s^2 + 2\zeta\omega_0s + \omega_0^2}$$

- ▶ **High-pass filter:**


$$G(s) = \frac{s^2}{s^2 + 2\zeta\omega_0s + \omega_0^2}$$

## LTI Systems as Filters




$$G(s) = \frac{\omega_0^2}{s^2 + 2\zeta\omega_0s + \omega_0^2}$$

(a) Low-pass filter



$$G(s) = \frac{2\zeta\omega_0s}{s^2 + 2\zeta\omega_0s + \omega_0^2}$$

(b) Band-pass filter



$$G(s) = \frac{s^2}{s^2 + 2\zeta\omega_0s + \omega_0^2}$$


(c) High-pass filter

**Figure:** Bode plots for low-pass, band-pass, and high-pass filters. Each system passes frequencies in a specific range and attenuates the frequencies outside of that range.

## Bode Plot Example 2

- ▶ Draw a Bode plot for  $G(s) = \frac{k(s + b)}{(s + a)(s^2 + 2\zeta\omega_0s + \omega_0^2)}$  with  $a \ll b \ll \omega_0$
- ▶ **Magnitude plot:**
  - ▶ Begin with  $G(0) = \frac{kb}{a\omega_0^2}$
  - ▶ At  $\omega = a$ , the effect of the real pole begins and the gain decreases with slope  $-20$  dB/decade
  - ▶ At  $\omega = b$ , the real zero increases the slope by  $20$  dB/decade, leaving a net slope of  $0$  dB/decade
  - ▶ This slope is used until the second-order pole affects it at  $\omega = \omega_0$  by  $-40$  dB/decade
- ▶ **Phase plot:**
  - ▶ The approximation process is similar but effect of the poles and zeros on the phase begin one decade earlier and terminate one decade later.

## Bode Plot Example 2

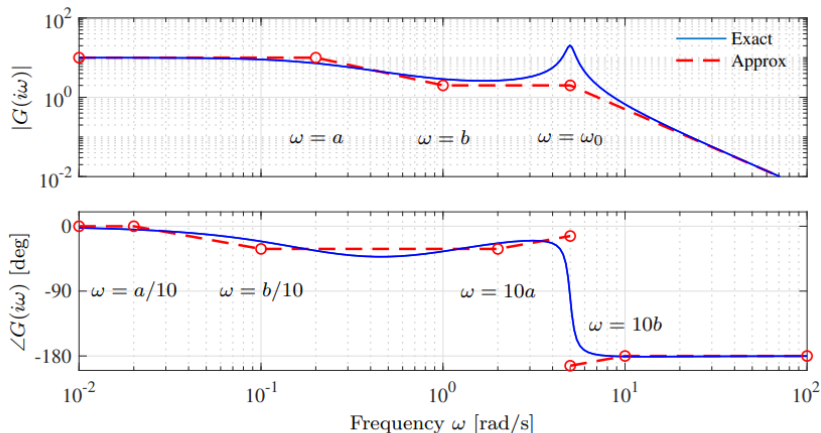

**Figure 9.15:** Asymptotic approximation to a Bode plot. The solid curve is the Bode plot for the transfer function  $G(s) = k(s+b)/(s+a)(s^2 + 2\zeta\omega_0s + \omega_0^2)$ , where  $a \ll b \ll \omega_0$ . Each segment in the gain and phase curves represents a separate portion of the approximation, where either a pole or a zero begins to have effect. Each segment of the approximation is a straight line between these points at a slope given by the rules for computing the effects of poles and zeros.

## Bode Plot Example 3


- Draw a Bode plot for  $G(s) = \frac{4(1 + 0.1s)}{s(1 + 0.5s)(1 + 0.6(s/50) + (s/50)^2)}$
- Factors in order of their occurrence as  $s = j\omega$  increases:
1. A constant gain  $\kappa = 4$
  2. A pole at the origin
  3. A pole at  $\omega = 2$
  4. A zero at  $\omega = 10$
  5. A pair of complex poles at  $\omega = \omega_n = 50$

## Bode Plot Example 3


- ▶ Consider the approximate magnitude plots:
  1. **Constant gain:**  $20 \log |\kappa| = 14 \text{ dB}$
  2. **Pole at the origin:** a line with slope  $-20 \text{ dB/decade}$  through  $0$  when  $\omega = 1$
  3. **Pole at  $\omega = 2$ :** horizontal line at  $0 \text{ dB}$  until the corner frequency at  $\omega = 2$  and a line with slope  $-20 \text{ dB/decade}$  after
  4. **Zero at  $\omega = 10$ :** horizontal line at  $0 \text{ dB}$  until the corner frequency at  $\omega = 10$  and a line with slope  $20 \text{ dB/decade}$  after
  5. **Complex pole pair at  $\omega = \omega_n = 50$ :** horizontal line at  $0 \text{ dB}$  until the corner frequency at  $\omega = 50$  and a line with slope  $-40 \text{ dB/decade}$  after
- ▶ The approximations must be corrected at the corner frequencies:
  - ▶ Real zero/pole:  $\pm 3 \text{ dB}$
  - ▶ Complex pair of zeros/poles: based on  $\zeta$




## Bode Plot Example 3

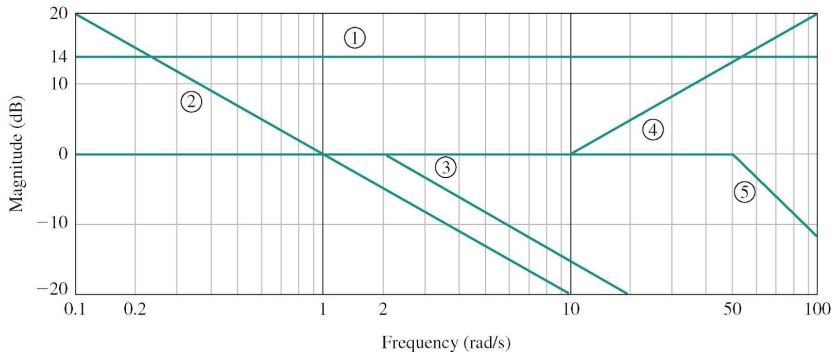

► Complex pole pair correction:

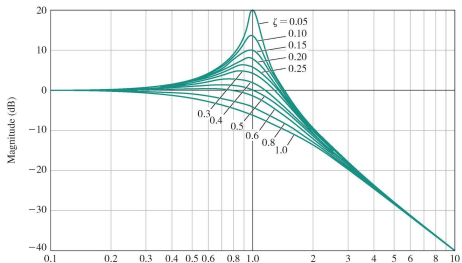


# Bode Plot Example 3

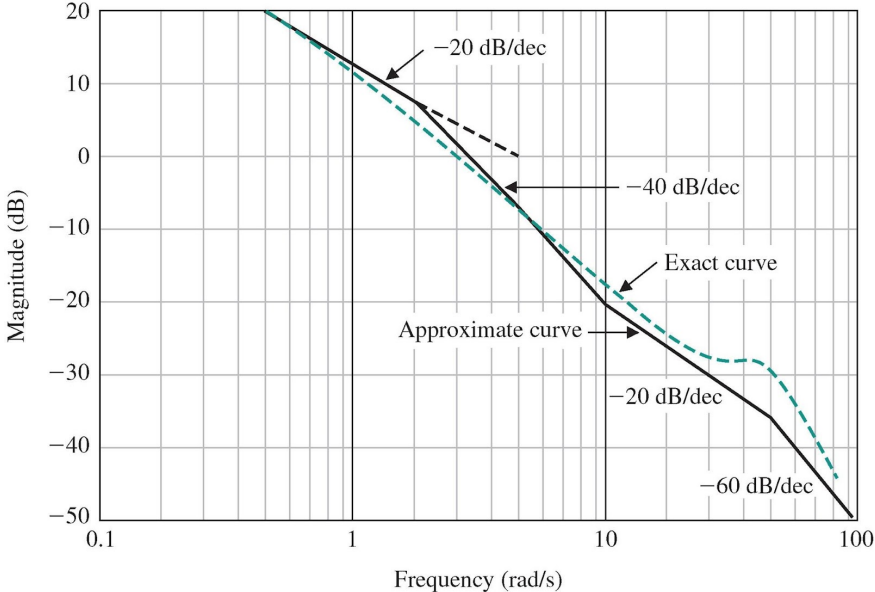


## Bode Plot Example 3

- ▶ Consider the approximate phase plots:
  1. **Constant gain:**  $\angle K = 0^\circ$
  2. **Pole at the origin:**  $-90^\circ$
  3. **Pole at  $\omega = 2$ :** a line with slope  $-45$  deg/decade from  $\omega = 0.2$  to  $\omega = 20$
  4. **Zero at  $\omega = 10$ :** a line with slope  $45$  deg/decade from  $\omega = 1$  to  $\omega = 100$
  5. **Complex pole pair at  $\omega = \omega_n = 50$ :** phase shift of  $-90$  deg/decade from  $\omega = 5$  to  $\omega = 500$
- ▶ The phase characteristic for the complex pole pair should be obtained from:

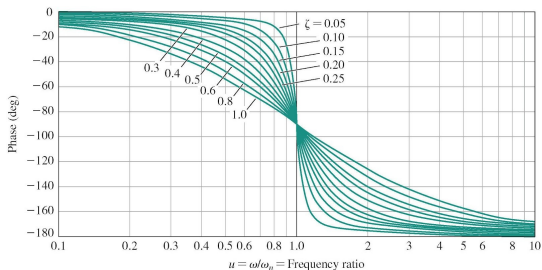

## Bode Plot Example 3

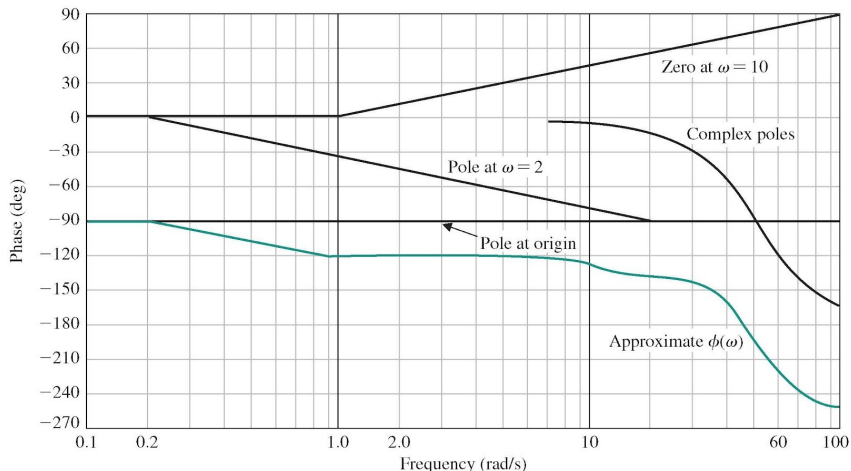

- The exact phase shift can be evaluated at important frequencies:

$$\angle G(j\omega) = \angle k + \sum_{i=1}^{m_1} \tan^{-1} \left( \frac{\omega}{z_i} \right) + \sum_{l=1}^{m_2} \tan^{-1} \left( \frac{2\zeta_l \omega_{n_l} \omega}{\omega_{n_l}^2 - \omega^2} \right) - n_0 \frac{\pi}{2} - \sum_{i=1}^{n_1} \tan^{-1} \left( \frac{\omega}{p_i} \right) - \sum_{k=1}^{n_2} \tan^{-1} \left( \frac{2\zeta_k \omega_{n_k} \omega}{\omega_{n_k}^2 - \omega^2} \right)$$

## Bode Plot Example 4

- ▶ Draw a Bode plot for

$$G(s) = \frac{(s+1)(s^2+3s+100)}{s^2(s+10)(s+100)} = \frac{(s+1)((s/10)^2 + 2(0.15)(s/10) + 1)}{10s^2(s/10+1)(s/100+1)}$$

- ▶ Magnitude and phase at  $\omega = 0.1$ :

$$20 \log |G(j\omega)| \approx 20dB \qquad \angle G(j\omega) \approx -180^\circ$$

- ▶ Magnitude slope in dB/decade:

$\omega$	Zero at $-1$	Zeros with $\omega_n = 10$	Double pole at 0	Pole at $-10$	Pole at $-100$
0.1 - 1	0	0	-40	0	0
1 - 10	20	0	-40	0	0
10 - 100	20	40	-40	-20	0
100 - 1000	20	40	-40	-20	-20


- ▶ Phase slope in degrees/decade:

$\omega$	Zero at $-1$	Zeros with $\omega_n = 10$	Double pole at 0	Pole at $-10$	Pole at $-100$
0.1 - 1	45	0	0	0	0
1 - 10	45	90	0	-45	0
10 - 100	0	90	0	-45	-45
100 - 1000	0	0	0	0	-45

## Bode Plot Example 4

- ▶ Draw a Bode plot for


$$G(s) = \frac{(s + 1)(s^2 + 3s + 100)}{s^2(s + 10)(s + 100)} = \frac{(s + 1)((s/10)^2 + 2(0.15)(s/10) + 1)}{10s^2(s/10 + 1)(s/100 + 1)}$$

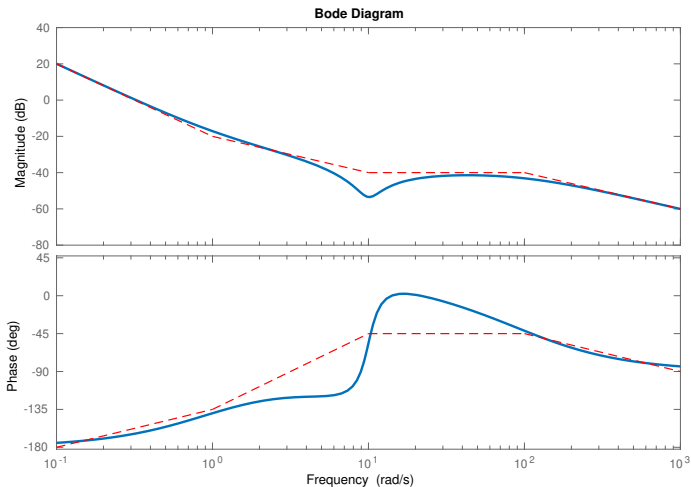

## Bode Plot in Matlab

- Bode plot for  $G(s) = \frac{4(s/2+1)}{s(2s+1)(1+0.4(s/8)+(s/8)^2)}$

```
1 s = tf('s');  
2 G = 4*(s/2+1)/s/(1+2*s)/(1+0.4*(s/8) + (s/8)^2);  
3 bodeplot(G);
```

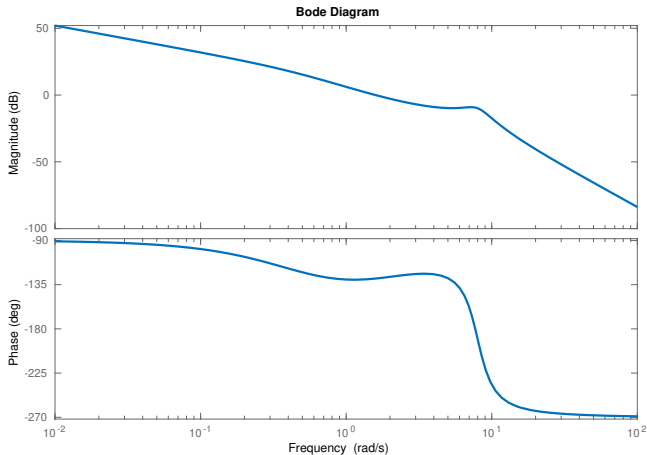

# Outline

Frequency Response

Bode Plot

Non-Minimum Phase Systems

Polar Plot

Magnitude-Phase Plot



## Non-Minimum Phase Systems

- ▶ **Minimum phase system:** a system whose transfer function poles and zeros are in the closed left half-plane
- ▶ **Non-minimum phase system:** a system whose transfer function has zeros or poles in the right half-plane
- ▶ Bode plots can also be drawn for non-minimum phase systems
- ▶ The magnitude of a transfer function does not depend on whether the zeros and poles are in the left or right half-plane
- ▶ The phase contribution of a zero or pole in the right half-plane is always at least as large as the phase contribution of a zero or pole in the left half-plane


## Non-Minimum Phase Systems

- ▶ To understand the difference between minimum and non-minimum phase systems compare the transfer functions:


$$G_1(s) = \frac{s + z}{s + p}$$

$$G_2(s) = \frac{s - z}{s + p}$$

- ▶ Magnitude:  $|G_1(j\omega)| = |G_2(j\omega)| = \frac{\sqrt{\omega^2 + z^2}}{\sqrt{\omega^2 + p^2}}$
- ▶ Phase:  $\angle G_1(j\omega_1)$  vs  $\angle G_2(j\omega_1)$

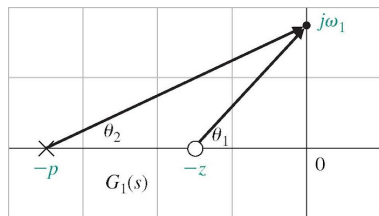


(a)

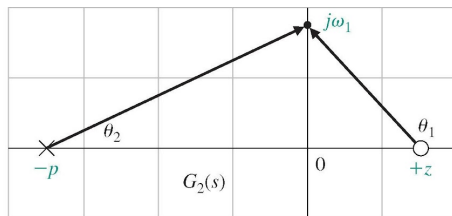

(b)

## Non-Minimum Phase Systems


- ▶ A minimum phase system has the smallest phase lag of all systems with the same magnitude curve

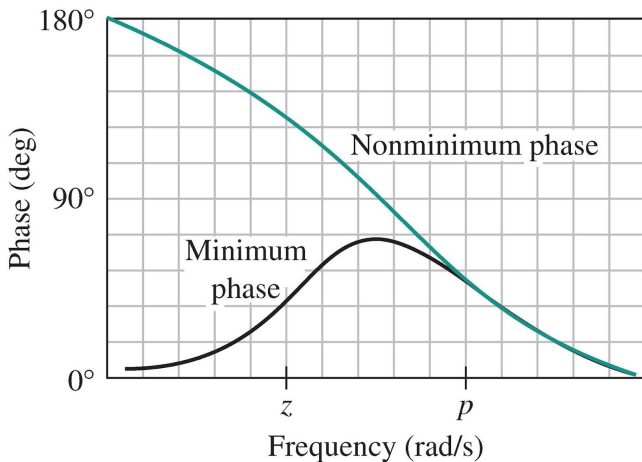

Copyright ©2017 Pearson Education, All Rights Reserved





## Non-minimum Phase Systems: Example 1

- ▶ Draw a Bode plot for  $G_1(s) = 10 \frac{s+1}{s+10}$  and  $G_2(s) = 10 \frac{s-1}{s+10}$

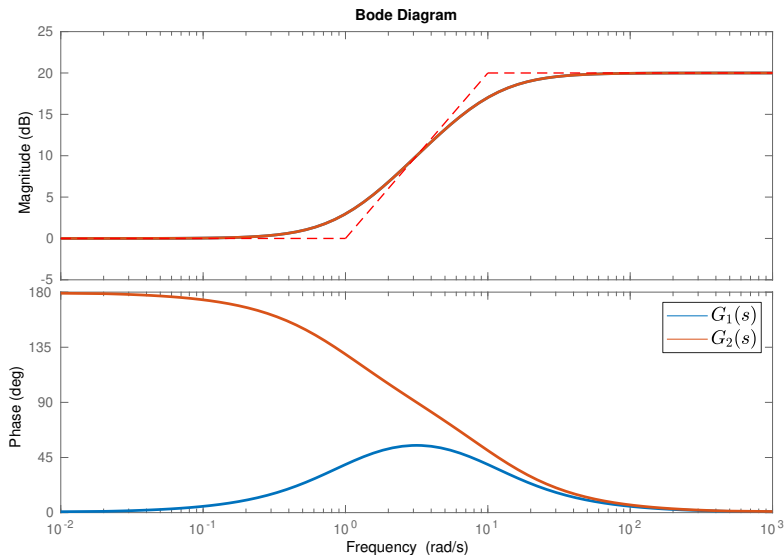

## Non-Minimum Phase Systems: Example 2


$$G(s) = \frac{s + 1}{(s + 0.1)(s + 10)} \quad G_{\text{rhpp}}(s) = \frac{s + 1}{(s - 0.1)(s + 10)} \quad G_{\text{rhpz}}(s) = \frac{-s + 1}{(s + 0.1)(s + 10)}$$

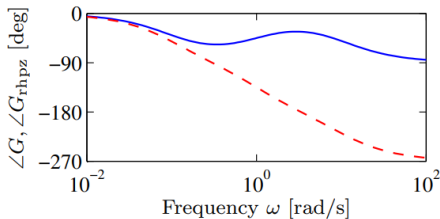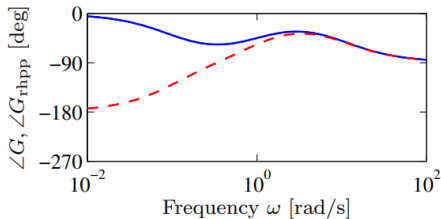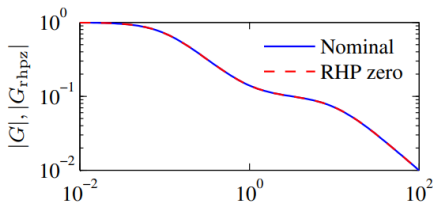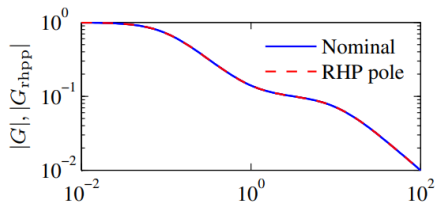


(a) Right half-plane pole

(b) Right half-plane zero


## Non-Minimum Phase Systems: Example 3



(a) Time delay



(b) Right half-plane zero



(c) Right half-plane pole

**Figure:** Bode plots of non-minimum phase systems: (a) Time delay  $G(s) = e^{-sT}$ , (b) system with right half-plane zero  $G(s) = (a - s)/(a + s)$ , (c) system with right half-plane pole  $G(s) = (s + a)/(s - a)$ . The corresponding minimum phase system has transfer function  $G(s) = 1$  in all cases.

## Non-Minimum Phase System Control

- ▶ The presence of poles and zeros in the right half-plane imposes limitations on the achievable control performance
- ▶ The extra phase causes difficulty for control because there is a delay between applying an input and seeing its effect
- ▶ **Zeros** depend on the relationship of inputs and outputs of a system. They can be changed by moving or adding sensors and actuators
- ▶ **Poles** are intrinsic to a system and do not depend on sensors or actuators

# Outline

Frequency Response

Bode Plot

Non-Minimum Phase Systems

**Polar Plot**

Magnitude-Phase Plot




## Polar Plot

- ▶ **Polar plot:** a plot of  $\text{Im}(G(j\omega))$  versus  $\text{Re}(G(j\omega))$  of a transfer function  $G(j\omega)$  as  $\omega$  varies from 0 to  $\infty$
- ▶ A polar plot contains less information than a Bode plot because the frequency values  $\omega$  are not captured
- ▶ The general shape of the polar plot can be determined from:
  - ▶ Magnitude  $|G(j\omega)|$  and phase  $\angle G(j\omega)$  at  $\omega = 0$  and  $\omega = \infty$
  - ▶ Intersection of the polar plot with the real and imaginary axes

## Polar Plot: Type 0 System

- ▶ Draw a polar plot for  $G(s) = \frac{1}{1+Ts}$
- ▶ Magnitude:  $|G(j\omega)| = \frac{1}{\sqrt{1+\omega^2 T^2}}$
- ▶ Phase:  $\angle G(j\omega) = -\tan^{-1}(\omega T)$
- ▶ Polar plot:  $|G(j0)| = 1$ ,  $\angle G(j0) = 0$ ;  $|G(j\infty)| = 0$ ,  $\angle G(j\infty) = -90^\circ$

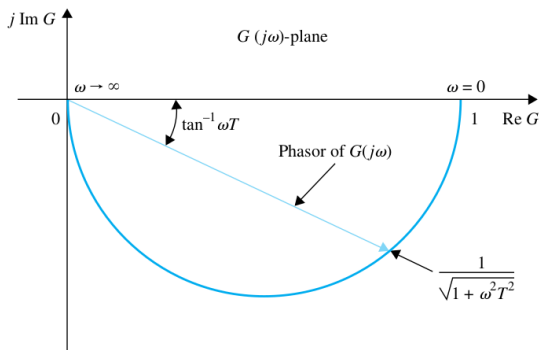

## Polar Plot: Type 0 System


- ▶ Draw a polar plot for  $G(s) = \frac{1+T_2s}{1+T_1s}$
- ▶ Magnitude:  $|G(j\omega)| = \frac{\sqrt{1+\omega^2 T_2^2}}{\sqrt{1+\omega^2 T_1^2}}$
- ▶ Phase:  $\angle G(j\omega) = \tan^{-1}(\omega T_2) - \tan^{-1}(\omega T_1)$
- ▶ The polar plot depends on the relative magnitudes of  $T_1$  and  $T_2$

- ▶ If  $T_2 > T_1$ :

$$|G(j\omega)| \geq 1 \quad \angle G(j\omega) \geq 0$$

- ▶ If  $T_1 > T_2$ :

$$|G(j\omega)| \leq 1 \quad \angle G(j\omega) \leq 0$$

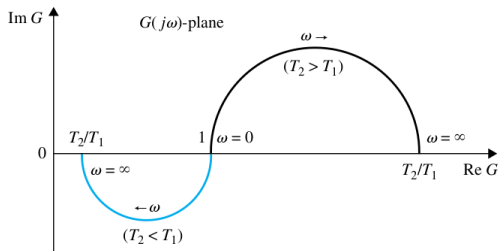


## Polar Plot: Type 0 System

- ▶ Draw a polar plot for  $G(s) = \frac{\kappa}{(1+T_1s)(1+T_2s)}$
- ▶ Magnitude  $|G(j\omega)|$  and phase  $\angle G(j\omega)$  at  $\omega = 0$  and  $\omega = \infty$ :

$$G(j0) = \kappa/\underline{0^\circ}$$

$$G(j\infty) = 0/\underline{-180^\circ}$$

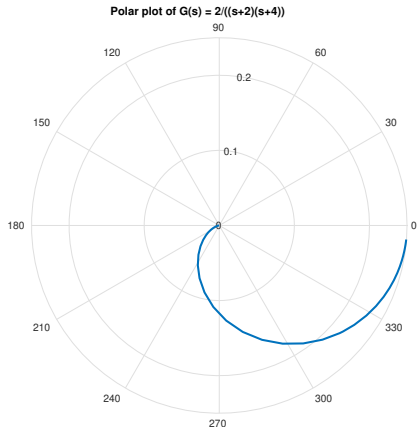

## Polar Plot: Type 1 System

- ▶ Draw a polar plot for  $G(s) = \frac{\kappa}{s(1+\tau s)}$

- ▶ Magnitude  $|G(j\omega)|$  and phase  $\angle G(j\omega)$ :

$$|G(j\omega)| = \frac{\kappa}{\sqrt{\omega^2 + \omega^4\tau^2}}$$

$$\angle G(j\omega) = -\frac{\pi}{2} - \tan^{-1}(\omega\tau)$$

- ▶ Values at  $\omega = 0$ ,  $\omega = 1/\tau$ ,  $\omega = \infty$ :


$$G(j0) = \infty \angle -90^\circ$$

$$G(j\frac{1}{\tau}) = \frac{\kappa\tau}{\sqrt{2}} \angle -135^\circ$$

$$G(j\infty) = 0 \angle -180^\circ$$

- ▶ Asymptote as  $\omega \rightarrow 0$ :

$$G(j\omega) = \frac{\kappa}{j\omega(1 + \tau j\omega)} \stackrel{\text{small } \omega}{\approx} \frac{\kappa}{j\omega} (1 - j\tau\omega) = -\kappa\tau - j\frac{\kappa}{\omega}$$

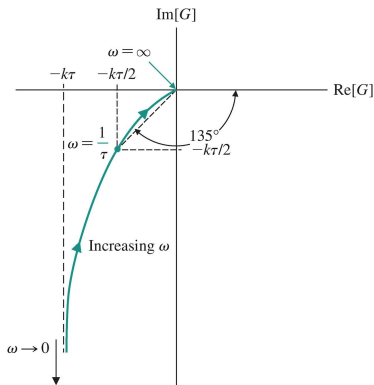

Copyright © 2011 Pearson Education, All Rights Reserved


## Polar Plot: Type 1 System

► Draw a polar plot for  $G(s) = \frac{k}{s(1+T_1s)(1+T_2s)}$

► Magnitude  $|G(j\omega)|$  and phase  $\angle G(j\omega)$  at  $\omega = 0$  and  $\omega = \infty$ :

$$G(j0) = \infty \underline{\angle -90^\circ}$$

$$G(j\infty) = 0 \underline{\angle -270^\circ}$$

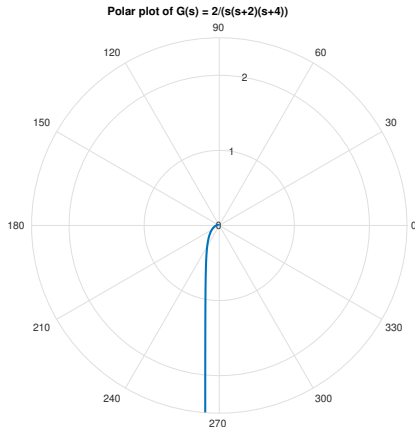


## Polar Plot: Type 2 System

► Draw a polar plot for  $G(s) = \frac{K}{s^2(1+T_1s)(1+T_2s)}$

► Magnitude  $|G(j\omega)|$  and phase  $\angle G(j\omega)$  at  $\omega = 0$  and  $\omega = \infty$ :

$$G(j0) = \infty \underline{\angle -180^\circ}$$


$$G(j\infty) = 0 \underline{\angle -360^\circ}$$

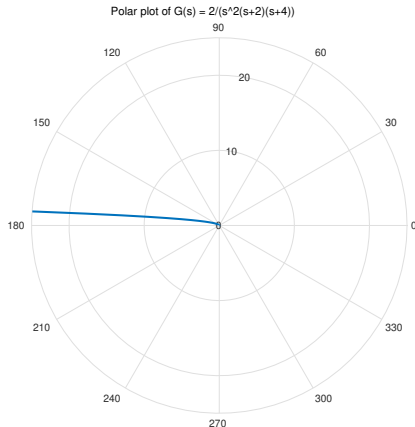

## Polar Plot in Matlab

► Nyquist plot for  $G(s) = \frac{4(s/2+1)}{s(2s+1)(1+0.4(s/8)+(s/8)^2)}$

```
1 s = tf('s');  
2 G = 4*(s/2+1)/s/(1+2*s)/(1+0.4*(s/8) + (s/8)^2);  
3 nyquistplot(G);
```

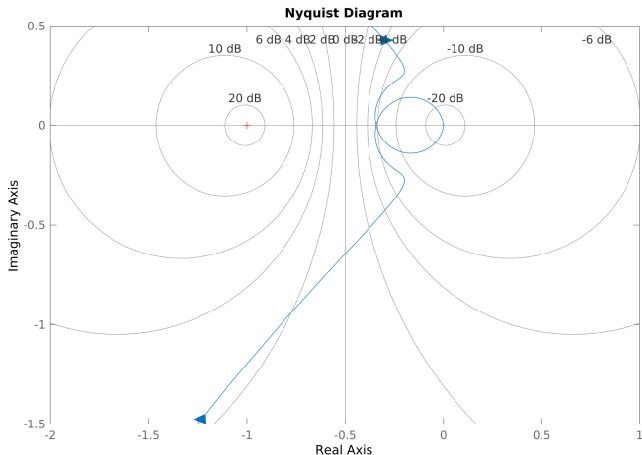



# Outline

Frequency Response

Bode Plot

Non-Minimum Phase Systems


Polar Plot

Magnitude-Phase Plot

## Magnitude-Phase Plot


- ▶ **Magnitude-phase plot:** a plot of the magnitude  $20 \log_{10} |G(j\omega)|$  in dB versus the phase  $\angle G(j\omega)$  in degrees as  $\omega$  varies from 0 to  $\infty$
- ▶ A magnitude-phase plot can be obtained from the information on a Bode plot
- ▶ A magnitude-phase plot is shifted up or down when the gain factor  $\kappa$  varies
- ▶ The Bode plot property of adding plots of individual components does not carry over

# Magnitude-Phase Plot

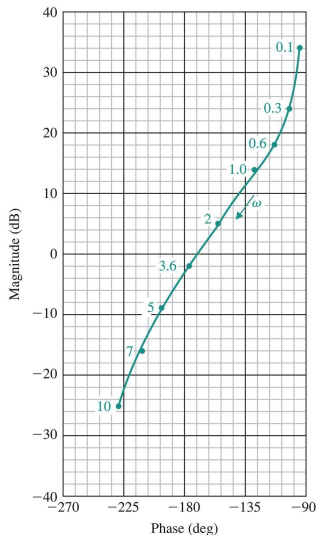

Copyright ©2017 Pearson Education, All Rights Reserved

$$(a) G_1(s) = \frac{5}{s(s/2+1)(s/6+2)}$$


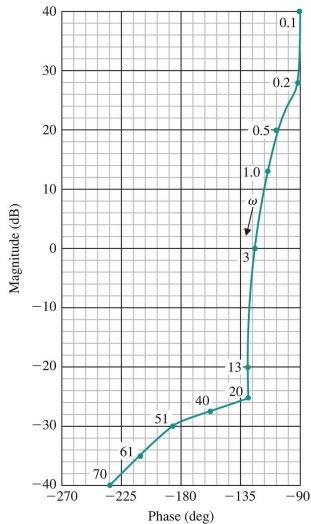


Copyright ©2017 Pearson Education, All Rights Reserved

$$(b) G_2(s) = \frac{5(s/10+1)}{s(s/2+1)(1+0.6(s/50)+(s/50)^2)}$$

# Magnitude-Phase Plot

- Draw a polar plot and a magnitude-phase plot for  $G(s) = \frac{10(s+10)}{s(s+2)(s+5)}$

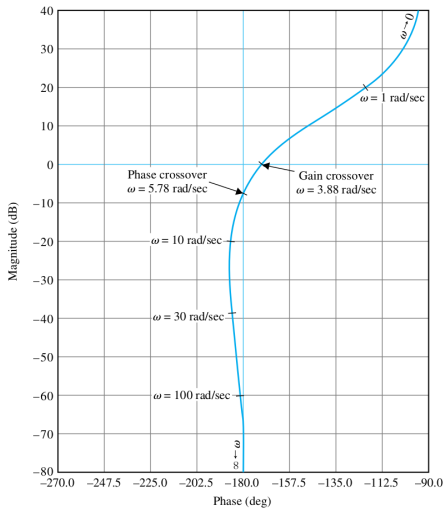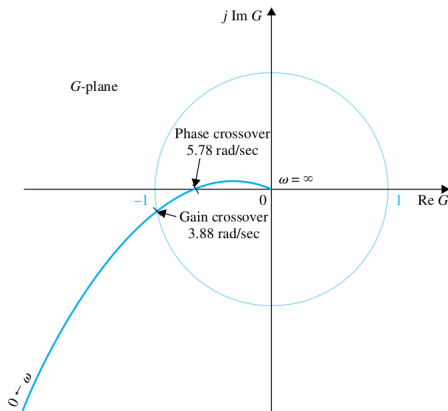

# Magnitude-Phase Plot in Matlab

► Nichols plot for  $G(s) = \frac{4(s/2+1)}{s(2s+1)(1+0.4(s/8)+(s/8)^2)}$

```
1 s = tf('s');  
2 G = 4*(s/2+1)/s/(1+2*s)/(1+0.4*(s/8) + (s/8)^2);  
3 nicholsplot(G);
```

