

ECE171A: Linear Control System Theory

Lecture 5: Transfer Function

Nikolay Atanasov

natanasov@ucsd.edu

UC San Diego

JACOBS SCHOOL OF ENGINEERING
Electrical and Computer Engineering

LTI ODE Solution

- ▶ Consider the LTI ODE system:

$$\begin{aligned}\dot{\mathbf{x}} &= \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u}, & \mathbf{x}(t_0) &= \mathbf{x}_0 \\ \mathbf{y} &= \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{u}\end{aligned}$$

- ▶ The system output satisfies the **convolution equation**:

$$\mathbf{y}(t) = \mathbf{C}e^{\mathbf{A}(t-t_0)}\mathbf{x}_0 + \int_{t_0}^t \mathbf{C}e^{\mathbf{A}(t-\tau)}\mathbf{B}\mathbf{u}(\tau)d\tau + \mathbf{D}\mathbf{u}(t)$$

- ▶ **Observations:**

- ▶ Using the convolution equation directly for control design can be challenging
- ▶ A simpler relationship between $\mathbf{u}(t)$ and $\mathbf{y}(t)$ can be obtained by transforming the LTI ODE from the time domain to the complex domain using a **Laplace transform**

Laplace Transform

The **Laplace transform** $\mathcal{L}$ maps a real function $f : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}$ to a complex function $F : \mathbb{C} \rightarrow \mathbb{C}$:

$$F(s) = \mathcal{L}\{f(t)\} = \int_0^{\infty} f(t)e^{-st} dt$$

- ▶ The Laplace transform $\mathcal{L}$ converts an LTI ODE in the time domain into a linear algebraic equation in the complex domain
- ▶ Example:

$$\begin{array}{ccc} \ddot{y}(t) + y(t) = 0 & \xrightarrow{\mathcal{L}} & s^2 Y(s) - sy(0) - \dot{y}(0) + Y(s) = 0 \\ & & \downarrow \\ y(t) = y(0) \cos(t) + \dot{y}(0) \sin(t) & \xleftarrow{\mathcal{L}^{-1}} & Y(s) = \frac{sy(0) + \dot{y}(0)}{s^2 + 1} \end{array}$$

Outline

Complex Numbers and Rational Functions

Polynomial and Rational Functions in MATLAB

Laplace Transform

Transfer Function

Outline

Complex Numbers and Rational Functions

Polynomial and Rational Functions in MATLAB

Laplace Transform

Transfer Function


Complex Numbers $\mathbb{C}$

- ▶ The **space of real numbers** is denoted by $\mathbb{R}$
- ▶ The **space of complex numbers** is denoted by $\mathbb{C}$
- ▶ A **complex number** has the form:

$$s = \sigma + j\omega,$$

where $\sigma, \omega \in \mathbb{R}$ and $j = \sqrt{-1}$

- ▶ Cartesian coordinates: $s = \sigma + j\omega$
 - ▶ The **real part** of s is $\text{Re}(s) = \sigma$
 - ▶ The **imaginary part** of s is $\text{Im}(s) = \omega$
- ▶ Polar coordinates: $s = re^{j\theta} = r(\cos(\theta) + j\sin(\theta))$
 - ▶ The **magnitude** of s is $|s| = r = \sqrt{\sigma^2 + \omega^2}$
 - ▶ The **phase** of s is $\arg(s) = \angle s = \theta = \text{atan2}(\omega, \sigma)$
- ▶ The **complex conjugate** of $s = \sigma + j\omega$ is $s^* = \sigma - j\omega$

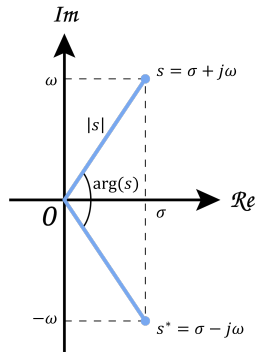

Complex Polynomial

- ▶ A **complex polynomial** of order n is a function $a : \mathbb{C} \rightarrow \mathbb{C}$:

$$a(s) = a_n s^n + a_{n-1} s^{n-1} + \dots + a_2 s^2 + a_1 s + a_0$$

where $a_0, a_1, \dots, a_n \in \mathbb{C}$ are constants.

- ▶ A **root** of a complex polynomial $a(s)$ is a number $\lambda \in \mathbb{C}$ such that:

$$a(\lambda) = 0$$

- ▶ A root λ of **multiplicity** m of a complex polynomial $a(s)$ satisfies:

$$\lim_{s \rightarrow \lambda} \frac{a(s)}{(s - \lambda)^m} < \infty$$

- ▶ **Fundamental theorem of algebra**: a complex polynomial $a(s)$ of degree n has exactly n roots, counting multiplicities, and can be factorized as:

$$a(s) = a_n s^n + \dots + a_0 = a_n (s - \lambda_1) \cdots (s - \lambda_n)$$

where $\lambda_1, \dots, \lambda_n$ are the n roots of $a(s)$

Complex Polynomial with Real Coefficients

- ▶ A complex polynomial of order n with real coefficients is a function:

$$a(s) = a_n s^n + a_{n-1} s^{n-1} + \dots + a_2 s^2 + a_1 s + a_0$$

where $a_0, a_1, \dots, a_n \in \mathbb{R}$ are constants.

- ▶ The roots of a complex polynomial with real coefficients are either real, $\lambda = \sigma$, or come in complex conjugate pairs, $\lambda = \sigma \pm j\omega$.
- ▶ Every complex polynomial with real coefficients can be factorized into polynomials of degree one or two:

$$a(s) = a_n s^n + \dots + a_0 = a_n \prod_{i=1}^{n_1} (s - \lambda_i) \prod_{k=1}^{n_2} (s^2 + 2\zeta_k \omega_k s + \omega_k^2)$$

where n_1 and n_2 are the numbers of real roots and complex conjugate pairs.

- ▶ **Vieta's formulas** relate the coefficients a_i to the roots λ_i :

$$\sum_{i=1}^n \lambda_i = -\frac{a_{n-1}}{a_n} \quad \prod_{i=1}^n \lambda_i = (-1)^n \frac{a_0}{a_n} \quad \sum_{1 \leq i_1 < i_2 < \dots < i_k \leq n} \prod_{j=1}^k \lambda_{i_j} = (-1)^k \frac{a_{n-k}}{a_n}$$

Rational Function

- ▶ A **rational function** $F : \mathbb{C} \rightarrow \mathbb{C}$ is a ratio of complex polynomials:

$$F(s) = \frac{b(s)}{a(s)} = \frac{b_ms^m + \dots + b_1s + b_0}{a_ns^n + \dots + a_1s + a_0}$$

- ▶ Rational functions remain rational functions under addition, subtraction, multiplication, division (except by 0)
- ▶ The **characteristic equation** of a rational function $F(s) = \frac{b(s)}{a(s)}$ is:

$$a(s) = 0$$

- ▶ A **zero** $z \in \mathbb{C}$ of a rational function $F(s)$ is a root of the numerator: $b(z) = 0$
- ▶ A **pole** $p \in \mathbb{C}$ of a rational function $F(s)$ is a root of the characteristic equation: $a(p) = 0$

Pole-Zero Map

- ▶ The **pole-zero form** of a rational function $F(s)$ is:

$$F(s) = \frac{b_ms^m + \dots + b_1s + b_0}{a_ns^n + \dots + a_1s + a_0} = k \frac{(s - z_1) \cdots (s - z_m)}{(s - p_1) \cdots (s - p_n)}$$


where $k = b_m/a_n$, $z_1, \dots, z_m$ are the zeros of $F(s)$, and $p_1, \dots, p_n$ are the poles of $F(s)$

- ▶ A **pole-zero map** is a plot of the poles and zeros of $F(s)$ in the s -domain:

- ▶ Example:

$$F(s) = k \frac{(s + 1.5)(s + 1 + 2j)(s + 1 - 2j)}{(s + 2.5)(s - 2)(s - 1 - j)(s - 1 + j)}$$

- ▶ $\times$ = pole; $\circ$ = zero; k = not available



Example: Zeros and Poles

- ▶ Consider $F(s) = \frac{2s+1}{3s^2+2s+1}$
- ▶ $F(s)$ has one zero: $z = -\frac{1}{2}$
- ▶ The roots of a quadratic polynomial $a(s) = a_2s^2 + a_1s + a_0$ are:

$$s = \frac{-a_1 \pm \sqrt{a_1^2 - 4a_2a_0}}{2a_2}$$

- ▶ $F(s)$ has two conjugate poles: $p_1 = -\frac{1}{3} + j\frac{\sqrt{2}}{3}$ and $p_2 = -\frac{1}{3} - j\frac{\sqrt{2}}{3}$
- ▶ Pole-zero form of $F(s)$:

$$F(s) = \frac{2(s - z)}{3(s - p_1)(s - p_2)}$$

Partial Fraction Expansion (no repeated poles)

- Assume that the rational function:

$$F(s) = \frac{b(s)}{a(s)} = \frac{b_ms^m + \dots + b_1s + b_0}{a_ns^n + \dots + a_1s + a_0}$$

is **strictly proper** ($m < n$) and has no repeated poles (all roots of $a(s)$ have multiplicity one)

- The **residue** r_i associated with pole p_i is:

$$r_i = \lim_{s \rightarrow p_i} (s - p_i)F(s)$$

- The **partial fraction expansion** of $F(s)$ is:

$$F(s) = \frac{r_1}{s - p_1} + \dots + \frac{r_n}{s - p_n}$$

where $p_1, \dots, p_n$ and $r_1, \dots, r_n$ are the poles and residues of $F(s)$

Example: Residues

- ▶ Consider $F(s) = \frac{2s+1}{3s^2+2s+1}$ with zero $z = -\frac{1}{2}$ and poles $p_{1,2} = -\frac{1}{3} \pm j\frac{\sqrt{2}}{3}$
- ▶ The residue associated with p_1 is:

$$\begin{aligned} r_1 &= \lim_{s \rightarrow p_1} (s - p_1)F(s) = \lim_{s \rightarrow p_1} \frac{2(s - z)}{3(s - p_2)} = \frac{2(p_1 + 1/2)}{3(p_1 - p_2)} \\ &= \frac{2(p_1 + 1/2)}{j2\sqrt{2}} = -j\frac{\sqrt{2}}{2} \left(\frac{1}{6} + j\frac{\sqrt{2}}{3} \right) = \frac{1}{3} - j\frac{\sqrt{2}}{12} \end{aligned}$$

- ▶ Residues associated with complex conjugate poles are also complex conjugate!
- ▶ The residue associated with $p_2 = p_1^*$ is $r_2 = r_1^* = \frac{1}{3} + j\frac{\sqrt{2}}{12}$
- ▶ The partial fraction expansion of $F(s)$ is:

$$F(s) = \frac{r_1}{(s - p_1)} + \frac{r_2}{(s - p_2)}$$

Partial Fraction Expansion (repeated poles)

- Assume that the rational function:

$$F(s) = \frac{b(s)}{a(s)} = \frac{b_ms^m + \dots + b_1s + b_0}{a_n(s - p_1)^{m_1} \dots (s - p_k)^{m_k}}$$

is **strictly proper** and has poles $p_1, \dots, p_k$ with multiplicities $m_1, \dots, m_k$

- The **residue** r_{i,m_i-j} associated with pole p_i of multiplicity m_i is:

$$r_{i,m_i-j} = \lim_{s \rightarrow p_i} \frac{1}{j!} \frac{d^j}{ds^j} [(s - p_i)^{m_i} F(s)], \quad j = 0, \dots, (m_i - 1)$$

- The **partial fraction expansion** of $F(s)$ is:

$$\begin{aligned} F(s) = & \frac{r_{1,m_1}}{(s - p_1)^{m_1}} + \frac{r_{1,m_1-1}}{(s - p_1)^{m_1-1}} + \dots + \frac{r_{1,1}}{s - p_1} \\ & + \frac{r_{2,m_2}}{(s - p_2)^{m_2}} + \frac{r_{2,m_2-1}}{(s - p_2)^{m_2-1}} + \dots + \frac{r_{2,1}}{s - p_2} \\ & + \dots \\ & + \frac{r_{k,m_k}}{(s - p_k)^{m_k}} + \frac{r_{k,m_k-1}}{(s - p_k)^{m_k-1}} + \dots + \frac{r_{k,1}}{s - p_k} \end{aligned}$$

Partial Fraction Expansion (improper rational function)

- ▶ Assume that the rational function:

$$F(s) = \frac{b(s)}{a(s)} = \frac{b_ms^m + \dots + b_1s + b_0}{a_ns^n + \dots + a_1s + a_0}$$

is not strictly proper ($m \geq n$)

- ▶ The numerator $b(s)$ can be divided by the denominator $a(s)$ to obtain:

$$F(s) = \frac{b(s)}{a(s)} = c(s) + \frac{d(s)}{a(s)}$$

where $c(s)$ is of order $m - n$ and $d(s)$ is of order $k < n$

- ▶ $\frac{d(s)}{a(s)}$ is now strictly proper and has a partial fraction expansion

Outline

Complex Numbers and Rational Functions

Polynomial and Rational Functions in MATLAB

Laplace Transform

Transfer Function

MATLAB Polynomial Functions

- Consider:

$$p(s) = (s - 11.6219)(s + 0.3110 + 2.6704j)(s + 0.3110 - 2.6704j)$$

- poly: convert roots to polynomial coefficients:

```
1 r = [11.6219, -0.3110-2.6704i, -0.3110+2.6704i]
  a = poly(r) = [1.0, -11.0, 0.0, -84.0]
```

- polyval: evaluate a polynomial, e.g., $p(1 - 2j)$:

```
 polyval(a, 1-2i) = -62 + 46i
```

- roots: find polynomial roots:

```
1 roots(a) = [11.6219, -0.3110-2.6704i, -0.3110+2.6704i]
```

- conv: expand the product of two polynomials, e.g., $(3s^2 + 2s + 1)(s + 4)$:

```
1 conv([3, 2, 1], [1, 4]) = [3, 14, 9, 4]
```

MATLAB Rational Functions

- ▶ $SYS = \text{zpk}(Z,P,K)$ creates a continuous-time zero-pole-gain (zpk) model SYS with zeros Z , poles P , and gains K :

```
1 dcmotor = zpk([], [-1], 200);  
  fbksys = zpk([-4], [-8.8426, -2.0787 + 1.7078i, -2.0787 -1.7078i], 8);
```

- ▶ $P = \text{pole}(SYS)$ returns the poles P of SYS :

```
sp = pole(fbksys) = [-8.8426, -2.0787 + 1.7078i, -2.0787 -1.7078i]
```

- ▶ $[Z,G] = \text{zero}(SYS)$ computes the zeros Z and gain G of SYS :

```
1 [sz,k] = zero(fbksys) = [-4, 8]
```

- ▶ $\text{pzmap}(SYS)$: computes and plots the poles and zeros of SYS

```
1 pzmap(fbksys)
```

Outline

Complex Numbers and Rational Functions

Polynomial and Rational Functions in MATLAB

Laplace Transform

Transfer Function

Laplace Transform and Inverse Laplace Transform

- ▶ The **Laplace transform** $F(s)$ of a function $f(t)$ is:

$$F(s) = \mathcal{L}\{f(t)\} = \int_0^{\infty} f(t)e^{-st}dt,$$

where $s = \sigma + j\omega$ is a complex number.

- ▶ The **inverse Laplace transform** $f(t)$ of a function $F(s)$ is:

$$f(t) = \mathcal{L}^{-1}\{F(s)\} = \frac{1}{2\pi j} \lim_{\omega \rightarrow \infty} \int_{\sigma - j\omega}^{\sigma + j\omega} F(s)e^{st}ds,$$

where σ is greater than the real part of all singularities of $F(s)$.

- ▶ **Cauchy's Residue Theorem:** If $F(s)$ is a strictly proper rational function:

$$f(t) = \mathcal{L}^{-1}\{F(s)\} = \sum_{s \text{ is a pole of } F(s)} (\text{residue of } F(s)e^{st} \text{ at } s)$$

Laplace Transform Properties

- ▶ The Laplace transform is **linear**:

$$\begin{aligned}\mathcal{L}\{\alpha f(t) + \beta g(t)\} &= \int_0^{\infty} (\alpha f(t) + \beta g(t))e^{-st} dt \\ &= \alpha \int_0^{\infty} f(t)e^{-st} dt + \beta \int_0^{\infty} g(t)e^{-st} dt \\ &= \alpha \mathcal{L}\{f(t)\} + \beta \mathcal{L}\{g(t)\}\end{aligned}$$

- ▶ **Convolution**: for $f(t)$, $g(t)$ supported on $t \in [0, \infty)$:

$$(f * g)(t) = \int_0^t f(\tau)g(t - \tau)d\tau$$

- ▶ Convolution in time domain becomes multiplication in the complex domain:

$$\begin{aligned}\mathcal{L}\{(f * g)(t)\} &= \int_0^{\infty} \int_0^{\infty} f(\tau)g(t - \tau)e^{-st} d\tau dt \\ &= \int_0^{\infty} \int_{-\tau}^{\infty} f(\tau)g(\mu)e^{-s\tau} e^{-s\mu} d\mu d\tau \\ &\quad \underline{\underline{g(\mu)=0, \mu < 0}} \int_0^{\infty} f(\tau)e^{-s\tau} d\tau \int_0^{\infty} g(\mu)e^{-s\mu} d\mu \\ &= \mathcal{L}\{f(t)\} \mathcal{L}\{g(t)\}\end{aligned}$$

Laplace Transform Properties

► Differentiation:

$$\mathcal{L} \left\{ \frac{d}{dt} x(t) \right\} = s \mathcal{L} \{ x(t) \} - x(0)$$

► Proof:

$$\int_0^{\infty} \frac{d}{dt} (x(t)e^{-st}) dt = x(t)e^{-st} \Big|_0^{\infty} = -x(0)$$

$$\begin{aligned} \int_0^{\infty} \frac{d}{dt} (x(t)e^{-st}) dt &= \int_0^{\infty} \left(\frac{d}{dt} x(t) \right) e^{-st} dt + \int_0^{\infty} x(t) \left(\frac{d}{dt} e^{-st} \right) dt \\ &= \mathcal{L} \left\{ \frac{d}{dt} x(t) \right\} - s \mathcal{L} \{ x(t) \} \end{aligned}$$

► Integration:

$$\mathcal{L} \left\{ \int_0^t f(\tau) d\tau \right\} = \frac{1}{s} \mathcal{L} \{ f(t) \}$$

► Note that $\frac{d}{dt} (\int_0^t f(\tau) d\tau) = f(t)$

Laplace Transform Properties

- ▶ Laplace transform of e^{at} :

$$\begin{aligned}\mathcal{L}\{e^{at}\} &= \int_0^{\infty} e^{at} e^{-st} dt = \int_0^{\infty} e^{-(s-a)t} dt = -\frac{1}{(s-a)} e^{-(s-a)t} \Big|_{t=0}^{t=\infty} \\ &\stackrel[\text{Require } \text{Re}(s) > a]{\text{require}} 0 - \left(-\frac{1}{(s-a)} e^0 \right) = \frac{1}{s-a}\end{aligned}$$

- ▶ **Delta function** (Impulse):

$$\delta_{\epsilon}(t) = \begin{cases} 0 & \text{if } t < 0 \\ 1/\epsilon & \text{if } 0 \leq t < \epsilon \\ 0 & \text{if } t \geq \epsilon \end{cases} \quad \delta(t) = \lim_{\epsilon \rightarrow 0} \delta_{\epsilon}(t) = \begin{cases} \infty, & t = 0 \\ 0, & t \neq 0 \end{cases}$$

- ▶ **Sifting property**: for any $f(t)$ continuous at $\tau \in (a, b)$:

$$\int_a^b f(t) \delta(t - \tau) dt = f(\tau)$$

- ▶ Laplace transform of $\delta(t)$:

$$\mathcal{L}\{\delta(t)\} = \int_0^{\infty} \delta(t) e^{-st} dt = e^{-st} \Big|_{t=0}^{\infty} = 1$$

Laplace Transform Properties

► Heaviside step function:

$$H(t) = \int_{-\infty}^t \delta(\tau) d\tau = \begin{cases} 1, & t \geq 0 \\ 0, & t < 0 \end{cases} \quad \Rightarrow \quad \mathcal{L}\{H(t)\} = \frac{1}{s}$$

► Ramp function:

$$tH(t) = \begin{cases} t, & t \geq 0 \\ 0, & t < 0 \end{cases} \quad \Rightarrow \quad \mathcal{L}\{tH(t)\} = \frac{1}{s^2}$$

► Parabola function:

$$\frac{t^2}{2}H(t) = \begin{cases} \frac{t^2}{2}, & t \geq 0 \\ 0, & t < 0 \end{cases} \quad \Rightarrow \quad \mathcal{L}\{\frac{t^2}{2}H(t)\} = \frac{1}{s^3}$$

Laplace Transform Properties

	t domain	s domain
linearity	$af(t) + bg(t)$	$aF(s) + bG(s)$
convolution	$(f * g)(t)$	$F(s)G(s)$
multiplication	$f(t)g(t)$	$\frac{1}{2\pi j} \int_{\text{Re}(\sigma)-j\infty}^{\text{Re}(\sigma)+j\infty} F(\sigma)G(s-\sigma)d\sigma$
scaling, $a > 0$	$f(at)$	$\frac{1}{a} F\left(\frac{s}{a}\right)$
s -domain derivative	$t^n f(t)$	$(-1)^n F^{(n)}(s)$
time-domain derivative	$f^{(n)}(t)$	$s^n F(s) - \sum_{k=1}^n s^{n-k} f^{(k-1)}(0)$
s -domain integration	$\frac{1}{t} f(t)$	$\int_s^\infty F(\sigma) d\sigma$
time-domain integration	$\int_0^t f(\tau) d\tau = (H * f)(t)$	$\frac{1}{s} F(s)$
s -domain shift	$e^{at} f(t)$	$F(s-a)$
time-domain shift, $a > 0$	$f(t-a)H(t-a)$	$e^{-as} F(s)$

► Heaviside step function $H(t) = \begin{cases} 1, & t \geq 0, \\ 0, & t < 0 \end{cases}$

► Convolution: $(f * g)(t) = \int_0^t f(\tau)g(t-\tau)d\tau$

Laplace Transform Properties

$f(t) = \mathcal{L}^{-1}\{F(s)\}$	$F(s) = \mathcal{L}\{f(t)\}$	$f(t) = \mathcal{L}^{-1}\{F(s)\}$	$F(s) = \mathcal{L}\{f(t)\}$
1. 1	$\frac{1}{s}$	2. e^{at}	$\frac{1}{s-a}$
3. $t^n, n=1,2,3,\dots$	$\frac{n!}{s^{n+1}}$	4. $t^p, p > -1$	$\frac{\Gamma(p+1)}{s^{p+1}}$
5. $\sqrt{t}$	$\frac{\sqrt{\pi}}{2s^{\frac{3}{2}}}$	6. $t^{n-\frac{1}{2}}, n=1,2,3,\dots$	$\frac{1 \cdot 3 \cdot 5 \cdots (2n-1)\sqrt{\pi}}{2^n s^{n+\frac{1}{2}}}$
7. $\sin(at)$	$\frac{a}{s^2+a^2}$	8. $\cos(at)$	$\frac{s}{s^2+a^2}$
9. $t \sin(at)$	$\frac{2as}{(s^2+a^2)^2}$	10. $t \cos(at)$	$\frac{s^2-a^2}{(s^2+a^2)^2}$
11. $\sin(at) - at \cos(at)$	$\frac{2a^3}{(s^2+a^2)^2}$	12. $\sin(at) + at \cos(at)$	$\frac{2as^2}{(s^2+a^2)^2}$
13. $\cos(at) - at \sin(at)$	$\frac{s(s^2-a^2)}{(s^2+a^2)^2}$	14. $\cos(at) + at \sin(at)$	$\frac{s(s^2+3a^2)}{(s^2+a^2)^2}$
15. $\sin(at+b)$	$\frac{s \sin(b) + a \cos(b)}{s^2+a^2}$	16. $\cos(at+b)$	$\frac{s \cos(b) - a \sin(b)}{s^2+a^2}$
17. $\sinh(at)$	$\frac{a}{s^2-a^2}$	18. $\cosh(at)$	$\frac{s}{s^2-a^2}$
19. $e^{at} \sin(bt)$	$\frac{b}{(s-a)^2+b^2}$	20. $e^{at} \cos(bt)$	$\frac{s-a}{(s-a)^2+b^2}$
21. $e^{at} \sinh(bt)$	$\frac{b}{(s-a)^2-b^2}$	22. $e^{at} \cosh(bt)$	$\frac{s-a}{(s-a)^2-b^2}$
23. $t^n e^{at}, n=1,2,3,\dots$	$\frac{n!}{(s-a)^{n+1}}$	24. $f(ct)$	$\frac{1}{c} F\left(\frac{s}{c}\right)$
25. $u_c(t) = u(t-c)$ Heaviside Function	$\frac{e^{-cs}}{s}$	26. $\delta(t-c)$ Dirac Delta Function	e^{-cs}
27. $u_c(t) f(t-c)$	$e^{-cs} F(s)$	28. $u_c(t) g(t)$	$e^{-cs} \mathcal{L}\{g(t+c)\}$
29. $e^{ct} f(t)$	$F(s-c)$	30. $t^n f(t), n=1,2,3,\dots$	$(-1)^n F^{(n)}(s)$
31. $\frac{1}{t} f(t)$	$\int_s^\infty F(u) du$	32. $\int_0^t f(v) dv$	$\frac{F(s)}{s}$
33. $\int_0^t f(t-\tau) g(\tau) d\tau$	$F(s) G(s)$	34. $f(t+T) = f(t)$	$\frac{\int_0^T e^{-st} f(t) dt}{1-e^{-sT}}$
35. $f'(t)$	$sF(s) - f(0)$	36. $f''(t)$	$s^2 F(s) - sf(0) - f'(0)$

Laplace Transform Properties

$f(t)$	$F(s)$
$\int_{-\infty}^t f(t) dt$	$\frac{F(s)}{s} + \frac{1}{s} \int_{-\infty}^0 f(t) dt$
Impulse function $\delta(t)$	1
$e^{-at} \sin \omega t$	$\frac{\omega}{(s+a)^2 + \omega^2}$
$e^{-at} \cos \omega t$	$\frac{s+a}{(s+a)^2 + \omega^2}$
$\frac{1}{\omega} [(\alpha - a)^2 + \omega^2]^{1/2} e^{-at} \sin(\omega t + \phi),$	$\frac{s+\alpha}{(s+a)^2 + \omega^2}$
$\phi = \tan^{-1} \frac{\omega}{\alpha - a}$	
$\frac{\omega_n}{\sqrt{1-\zeta^2}} e^{-\zeta \omega_n t} \sin \omega_n \sqrt{1-\zeta^2} t, \zeta < 1$	$\frac{\omega_n^2}{s^2 + 2\zeta \omega_n s + \omega_n^2}$
$\frac{1}{a^2 + \omega^2} + \frac{1}{\omega \sqrt{a^2 + \omega^2}} e^{-at} \sin(\omega t - \phi),$	$\frac{1}{s[(s+a)^2 + \omega^2]}$
$\phi = \tan^{-1} \frac{\omega}{-a}$	
$1 - \frac{1}{\sqrt{1-\zeta^2}} e^{-\zeta \omega_n t} \sin(\omega_n \sqrt{1-\zeta^2} t + \phi),$	$\frac{\omega_n^2}{s(s^2 + 2\zeta \omega_n s + \omega_n^2)}$
$\phi = \cos^{-1} \zeta, \zeta < 1$	
$\frac{\alpha}{a^2 + \omega^2} + \frac{1}{\omega} \left[\frac{(\alpha - a)^2 + \omega^2}{a^2 + \omega^2} \right]^{1/2} e^{-at} \sin(\omega t + \phi).$	$\frac{s+\alpha}{s[(s+a)^2 + \omega^2]}$
$\phi = \tan^{-1} \frac{\omega}{\alpha - a} - \tan^{-1} \frac{\omega}{-a}$	

Initial and Final Value Theorems

Initial Value Theorem

Suppose that $f(t)$ has a Laplace transform $F(s)$. Then:

$$\lim_{t \rightarrow 0} f(t) = \lim_{s \rightarrow \infty} sF(s)$$

Final Value Theorem

Suppose that $f(t)$ has a Laplace transform $F(s)$. Suppose that every pole of $F(s)$ is either in the open left-half plane or at the origin of $\mathbb{C}$. Then:

$$\lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} sF(s)$$

Example: Spring-Mass-Damper

- Consider a spring-mass-damper system:

$$M \frac{d^2 y(t)}{dt^2} + b \frac{dy(t)}{dt} + ky(t) = 0$$

- This is an example of a second-order system with **natural frequency** $\omega_n = \sqrt{k/M}$ and **damping ratio** $\zeta = b/(2\sqrt{kM})$:

$$\ddot{y}(t) + 2\zeta\omega_n\dot{y}(t) + \omega_n^2 y(t) = 0$$

- Laplace transform:

$$(s^2 Y(s) - sy(0) - \dot{y}(0)) + 2\zeta\omega_n(sY(s) - y(0)) + \omega_n^2 Y(s) = 0$$

- Natural response:

$$Y(s) = \frac{(s + 2\zeta\omega_n)y(0) + \dot{y}(0)}{s^2 + 2\zeta\omega_n s + \omega_n^2}$$

Example: Spring-Mass-Damper

- Consider the natural response with $\omega_n^2 = k/M = 2$ and $2\zeta\omega_n = b/M = 3$:

$$\begin{aligned} Y(s) &= \frac{(s+3)y(0) + \dot{y}(0)}{s^2 + 3s + 2} = \frac{(s+3)y(0) + \dot{y}(0)}{(s+1)(s+2)} \\ &= \frac{2y(0) + \dot{y}(0)}{s+1} - \frac{y(0) + \dot{y}(0)}{s+2} \end{aligned}$$

- Poles: $p_1 = -1$ and $p_2 = -2$

- Zeros: $z_1 = -\frac{\dot{y}(0)}{y(0)} - 3$

- Residues:

$$\begin{aligned} r_1 &= \left. \frac{(s+3)y(0) + \dot{y}(0)}{(s+2)} \right|_{s=-1} \\ &= 2y(0) + \dot{y}(0) \end{aligned}$$

$$\begin{aligned} r_2 &= \left. \frac{(s+3)y(0) + \dot{y}(0)}{(s+1)} \right|_{s=-2} \\ &= -y(0) - \dot{y}(0) \end{aligned}$$


Example: Spring-Mass-Damper

► Spring-Mass-Damper Pole-Zero Map

► Let the initial conditions be $y(0) = 1$ and $\dot{y}(0) = 0$


► The poles and zeros are:

$$p_1 = -1, \quad p_2 = -2, \quad z_1 = -3$$

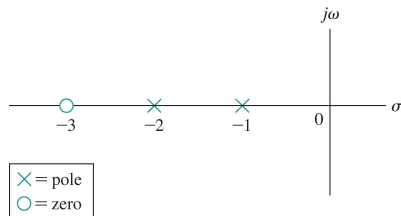

► The residues are:

$$r_1 = \left. \frac{(s+3)}{(s+2)} \right|_{s=-1} = 2$$
$$r_2 = \left. \frac{(s+3)}{(s+1)} \right|_{s=-2} = -1$$

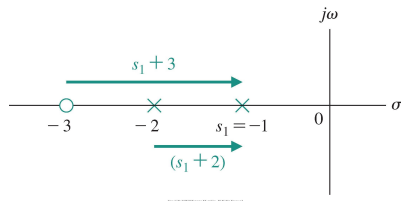

Example: Spring-Mass-Damper

- The time-domain **natural response** of the spring-mass-damper system can be obtained using an inverse Laplace transform:

$$\begin{aligned}y(t) &= \mathcal{L}^{-1}\{Y(s)\} = \mathcal{L}^{-1}\left\{\frac{2y(0) + \dot{y}(0)}{s+1}\right\} - \mathcal{L}^{-1}\left\{\frac{y(0) + \dot{y}(0)}{s+2}\right\} \\&= (2y(0) + \dot{y}(0))e^{-t} - (y(0) + \dot{y}(0))e^{-2t}\end{aligned}$$

- The **steady-state** response can be obtained via the Final Value Theorem:

$$\begin{aligned}\lim_{t \rightarrow \infty} y(t) &= \lim_{s \rightarrow 0} sY(s) \\&= \lim_{s \rightarrow 0} \frac{(s^2 + 3s)y(0) + s\dot{y}(0)}{s^2 + 3s + 2} = 0\end{aligned}$$

Example: Spring-Mass-Damper

- ▶ The poles of the system are the roots of the characteristic equation:

$$a(s) = s^2 + 2\zeta\omega_n s + \omega_n^2 = 0$$

- ▶ The natural response is determined by the poles:

- ▶ **Overdamped** ($\zeta > 1$): the poles are real:

$$p_1 = -\zeta\omega_n - \omega_n\sqrt{\zeta^2 - 1} \quad p_2 = -\zeta\omega_n + \omega_n\sqrt{\zeta^2 - 1}$$



- ▶ **Critically damped** ($\zeta = 1$): the poles are repeated and real:

$$p_1 = p_2 = -\omega_n$$

- ▶ **Underdamped** ($\zeta < 1$): the poles are complex:

$$p_1 = -\zeta\omega_n - j\omega_n\sqrt{1 - \zeta^2} \quad p_2 = -\zeta\omega_n + j\omega_n\sqrt{1 - \zeta^2}$$

Example: Spring-Mass-Damper Locus of Roots

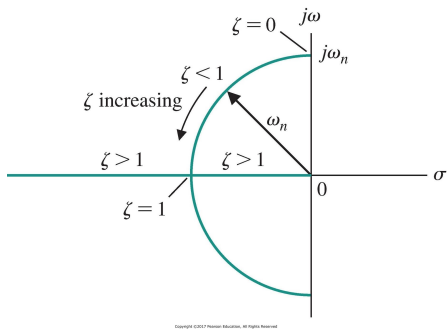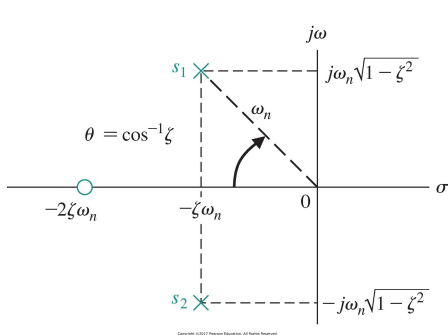

- s-domain plot of the poles ($\times$) and zeros ($\circ$) of $Y(s)$ with $\dot{y}(0) = 0$
- For constant ω_n , as ζ varies, the complex conjugate roots follow a circular locus
- The poles and zeros can be expressed either in Cartesian coordinates or Polar coordinates (e.g., magnitude ω_n and angle $\theta = \cos^{-1}(\zeta)$)

Example: Spring-Mass-Damper Response

- ▶ The time-domain natural response can be obtained by determining the residues and applying an inverse Laplace transform:

- ▶ **Overdamped** ($\zeta > 1$):

$$y(t) = r_1 e^{p_1 t} + r_2 e^{p_2 t}$$

where $p_1 = -\zeta\omega_n - \omega_n\sqrt{\zeta^2 - 1}$, $p_2 = -\zeta\omega_n + \omega_n\sqrt{\zeta^2 - 1}$, $r_1 = \frac{p_2 y(0) + \dot{y}(0)}{p_2 - p_1}$,
and $r_2 = -\frac{p_1 y(0) + \dot{y}(0)}{p_2 - p_1}$

- ▶ **Critically damped** ($\zeta = 1$):


$$y(t) = y(0)e^{-\omega_n t} + (\dot{y}(0) + \omega_n y(0))te^{-\omega_n t}$$

- ▶ **Underdamped** ($\zeta < 1$):

$$y(t) = e^{-\zeta\omega_n t} \left(c_1 \cos(\omega_n \sqrt{1 - \zeta^2} t) + c_2 \sin(\omega_n \sqrt{1 - \zeta^2} t) \right)$$

where $c_1 = y(0)$ and $c_2 = \frac{\dot{y}(0) + \zeta\omega_n y(0)}{\omega_n \sqrt{1 - \zeta^2}}$

Example: Spring-Mass-Damper Natural Response with $\dot{y}(0) = 0$

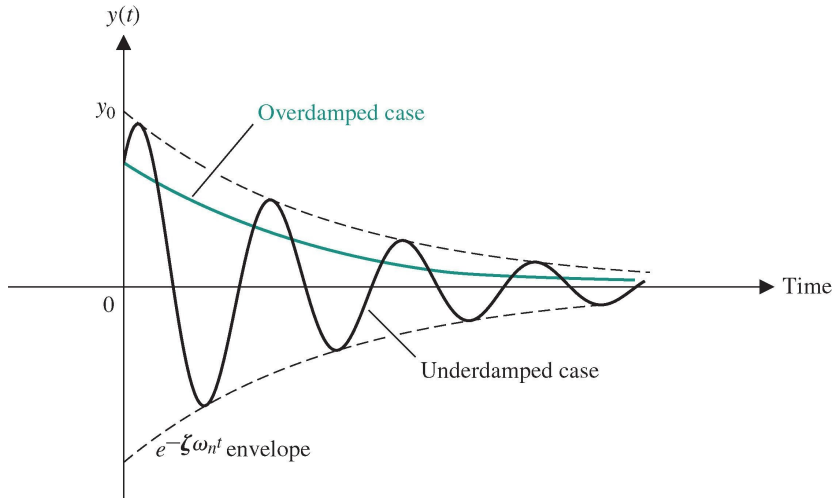

Copyright ©2017 Pearson Education, All Rights Reserved

Outline

Complex Numbers and Rational Functions

Polynomial and Rational Functions in MATLAB

Laplace Transform

Transfer Function

Laplace Transform of LTI ODE

- ▶ Consider an LTI ODE with zero initial conditions:

$$a_n \frac{d^n y}{dt^n} + a_{n-1} \frac{d^{n-1} y}{dt^{n-1}} + \dots + a_0 y = b_m \frac{d^m u}{dt^m} + b_{m-1} \frac{d^{m-1} u}{dt^{m-1}} + \dots + b_0 u$$

- ▶ Let $Y(s) = \mathcal{L}\{y(t)\}$ and $U(s) = \mathcal{L}\{u(t)\}$

- ▶ Recall that $\mathcal{L}\left\{\frac{d^n}{dt^n}y(t)\right\} = s^n Y(s) - \sum_{k=1}^n s^{n-k} \frac{d^{k-1}}{dt^{k-1}}y(t) \Big|_{t=0}$

- ▶ Laplace transform of the LTI ODE:

$$(a_n s^n + a_{n-1} s^{n-1} + \dots + a_0) Y(s) = (b_m s^m + b_{m-1} s^{m-1} + \dots + b_0) U(s)$$

- ▶ **Transfer function:** ratio of Laplace transform of output to Laplace transform of input with zero initial conditions:

$$G(s) = \frac{Y(s)}{U(s)} = \frac{b_m s^m + b_{m-1} s^{m-1} + \dots + b_0}{a_n s^n + a_{n-1} s^{n-1} + \dots + a_0}$$

Transfer Function

Transfer Function

The transfer function $G(s)$ of a single-input single-output LTI ODE is the ratio of the Laplace transform $Y(s)$ of the output $y(t)$ to the Laplace transform $U(s)$ of the input $u(t)$ with zero initial conditions:

$$G(s) = \frac{Y(s)}{U(s)}$$

Relative Degree

The relative degree of a single-input single-output LTI ODE with transfer function $G(s)$ is the difference $r = n - m$ between the number of poles n and number of zeros m of $G(s)$.

- ▶ If $r > 0$, the transfer function is called *strictly proper*.
- ▶ If $r \geq 0$, the transfer function is called *proper*.
- ▶ If $r < 0$, the transfer function is called *improper* (there is no state space realization).

Example

- ▶ A vehicle with position $p(t)$ and acceleration input $u(t)$ satisfies:

$$m\ddot{p}(t) = u(t)$$

- ▶ The transfer function of this system is:

$$G(s) = \frac{P(s)}{U(s)} = \frac{1}{ms^2}$$

- ▶ The transfer function is strictly proper with relative degree $r = 2$

Example: Second-order LTI ODE

- Consider a second-order system with natural frequency ω_n , damping ratio ζ , and input $u(t)$:

$$\ddot{y}(t) + 2\zeta\omega_n\dot{y}(t) + \omega_n^2y(t) = u(t)$$

- Laplace transform:

$$(s^2Y(s) - sy(0) - \dot{y}(0)) + 2\zeta\omega_n(sY(s) - y(0)) + \omega_n^2Y(s) = U(s)$$

- Transfer function (set $y(0) = \dot{y}(0) = 0$):

$$G(s) = \frac{Y(s)}{U(s)} = \frac{1}{s^2 + 2\zeta\omega_ns + \omega_n^2}$$

- Total response:

$$Y(s) = \underbrace{\frac{(s + 2\zeta\omega_n)y(0) + \dot{y}(0)}{s^2 + 2\zeta\omega_ns + \omega_n^2}}_{\text{natural response}} + \underbrace{G(s)U(s)}_{\text{forced response}}$$

Transfer Function of State-Space Model

- ▶ Consider an LTI ODE system in state-space:

$$\dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u}$$

$$\mathbf{y} = \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{u}$$

- ▶ Laplace transform:

$$s\mathbf{X}(s) - \mathbf{x}(0) = \mathbf{A}\mathbf{X}(s) + \mathbf{B}\mathbf{U}(s)$$

$$\mathbf{Y}(s) = \mathbf{C}\mathbf{X}(s) + \mathbf{D}\mathbf{U}(s)$$

- ▶ The response $\mathbf{Y}(s)$ of LTI ODE system consists of **natural response** due to the initial conditions $\mathbf{x}(0)$ and **forced response** due to the input $\mathbf{U}(s)$:

$$\mathbf{Y}(s) = \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{x}(0) + \underbrace{\left(\mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}\right)}_{\mathbf{G}(s)}\mathbf{U}(s)$$

The transfer function of an LTI ODE system in state-space form is:

$$\mathbf{G}(s) = \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}$$

Example

- Consider a SISO LTI ODE with state-space model:

$$\mathbf{A} = \begin{bmatrix} 0 & 1 \\ -1 & -2 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad \mathbf{C} = \begin{bmatrix} 1 & 0 \end{bmatrix}, \quad \mathbf{D} = 0$$

- Transfer function:

$$\begin{aligned} G(s) &= \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D} = \begin{bmatrix} 1 & 0 \end{bmatrix} \begin{bmatrix} s & -1 \\ 1 & s+2 \end{bmatrix}^{-1} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \\ &= \begin{bmatrix} 1 & 0 \end{bmatrix} \frac{1}{s^2 + 2s + 1} \begin{bmatrix} s+2 & 1 \\ -1 & s \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \\ &= \frac{1}{s^2 + 2s + 1}. \end{aligned}$$

Controllable Canonical Form

- ▶ Consider a general n -th order transfer function (some of b_i may be 0):

$$G(s) = \frac{Y(s)}{U(s)} = \frac{b_n s^n + b_{n-1} s^{n-1} + \dots + b_0}{s^n + a_{n-1} s^{n-1} + \dots + a_0}$$

- ▶ To convert this transfer function to state-space form multiply by $Z(s)/Z(s)$:

$$G(s) = \frac{Y(s)/Z(s)}{U(s)/Z(s)} = \frac{b_n s^n + b_{n-1} s^{n-1} + \dots + b_0}{s^n + a_{n-1} s^{n-1} + \dots + a_0}$$

- ▶ Time-domain LTI ODEs:

$$y = b_n z^{(n)} + b_{n-1} z^{(n-1)} + \dots + b_1 \dot{z} + b_0 z$$

$$u = z^{(n)} + a_{n-1} z^{(n-1)} + \dots + a_1 \dot{z} + a_0 z$$

- ▶ This suggests the following choice of state variables:

$$x_1 = z \quad x_2 = \dot{z} \quad \dots \quad x_n = z^{(n-1)}$$

Controllable Canonical Form

- Consider a general n -th order transfer function (some of b_i may be 0):

$$G(s) = \frac{Y(s)}{U(s)} = \frac{b_n s^n + b_{n-1} s^{n-1} + \dots + b_0}{s^n + a_{n-1} s^{n-1} + \dots + a_0}$$

- The **controllable canonical form** is a state-space model with the same transfer function:

$$\dot{\mathbf{x}} = \begin{bmatrix} 0 & 1 & 0 & \cdots & 0 \\ 0 & 0 & 1 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \cdots & 1 \\ -a_0 & -a_1 & -a_2 & \cdots & -a_{n-1} \end{bmatrix} \mathbf{x} + \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ 1 \end{bmatrix} u$$
$$y = [(b_0 - a_0 b_n) \quad (b_1 - a_1 b_n) \quad \cdots \quad (b_{n-1} - a_{n-1} b_n)] \mathbf{x} + b_n u$$

Example

- Consider a SISO LTI ODE with state-space model:

$$\mathbf{A} = \begin{bmatrix} 0 & 1 \\ -1 & -2 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad \mathbf{C} = \begin{bmatrix} 1 & 0 \end{bmatrix}, \quad \mathbf{D} = 0$$

- Transfer function:

$$\begin{aligned} G(s) &= \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D} = \begin{bmatrix} 1 & 0 \end{bmatrix} \begin{bmatrix} s & -1 \\ 1 & s+2 \end{bmatrix}^{-1} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \\ &= \begin{bmatrix} 1 & 0 \end{bmatrix} \frac{1}{s^2 + 2s + 1} \begin{bmatrix} s+2 & 1 \\ -1 & s \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} \\ &= \frac{1}{s^2 + 2s + 1}. \end{aligned}$$

Response to Periodic Signals

- ▶ The idea of a transfer function comes from looking at the response of an LTI ODE system to periodic input signals with fundamental frequency ω_f :

$$u(t) = \sum_{k=0}^{\infty} (a_k \sin(k\omega_f t) + b_k \cos(k\omega_f t))$$

- ▶ **Euler's formula:** $e^{j\omega} = \cos \omega + j \sin \omega$
- ▶ The exponential function e^{st} with $s = j\omega$ can represent periodic signals:

$$\sin(\omega t) = \text{Im}(e^{j\omega t}) = \frac{1}{2j} (e^{j\omega t} - e^{-j\omega t})$$

$$\cos(\omega t) = \text{Re}(e^{j\omega t}) = \frac{1}{2} (e^{j\omega t} + e^{-j\omega t})$$

- ▶ Thanks to linearity (**superposition**), it suffices to compute the response to $u(t) = e^{st}$ and then reconstruct the response to a cosine or sine by combining the responses corresponding to $s = j\omega$ and $s = -j\omega$







Exponential Input e^{st}

- ▶ The exponential input e^{st} generalizes periodic signals to a broader class:

$$e^{st} = e^{\sigma t} e^{j\omega t} = e^{\sigma t} (\cos(\omega t) + j \sin(\omega t))$$

- ▶ Examples of exponential signals:

- ▶ Top row: exponential signals with a real exponent $s = \sigma$
- ▶ Bottom row: exponential signals with a complex exponent $s = j\omega$



Frequency Domain Analysis

- Analyze LTI ODE response to sinusoidal and exponential signals

- State-space model:

$$\begin{aligned}\dot{\mathbf{x}} &= \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u}, & \mathbf{x}(0) &= \mathbf{x}_0 \\ \mathbf{y} &= \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{u}\end{aligned}$$

- Convolution equation:

$$\mathbf{y}(t) = \mathbf{C}e^{\mathbf{A}t}\mathbf{x}_0 + \int_0^t \mathbf{C}e^{\mathbf{A}(t-\tau)}\mathbf{B}\mathbf{u}(\tau)d\tau + \mathbf{D}\mathbf{u}(t)$$

- SISO system with input $u(t) = e^{st}$ such that s is not an eigenvalue of $\mathbf{A}$:

$$\begin{aligned}y(t) &= \underbrace{\mathbf{C}e^{\mathbf{A}t}\mathbf{x}_0}_{\text{natural response}} + \underbrace{\mathbf{C}e^{\mathbf{A}t}(\mathbf{s}\mathbf{I} - \mathbf{A})^{-1} \left(e^{(\mathbf{s}\mathbf{I} - \mathbf{A})t} - \mathbf{I} \right) \mathbf{B} + \mathbf{D}e^{st}}_{\text{forced response}} \\ &= \underbrace{\mathbf{C}e^{\mathbf{A}t} \left(\mathbf{x}(0) - (\mathbf{s}\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} \right)}_{\text{transient response}} + \underbrace{\left(\mathbf{C}(\mathbf{s}\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D} \right) e^{st}}_{\text{steady-state response}}\end{aligned}$$

Frequency Domain Analysis

- SISO LTI ODE response to $u(t) = e^{st}$:

$$y(t) = \underbrace{\mathbf{C}e^{\mathbf{A}t} (\mathbf{x}(0) - (\mathbf{sI} - \mathbf{A})^{-1}\mathbf{B})}_{\text{transient response}} + \underbrace{(\mathbf{C}(\mathbf{sI} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}) e^{st}}_{\text{steady-state response}}$$

The transfer function from $u(t)$ to $y(t)$ of a SISO LTI ODE is the coefficient of the **steady-state response to an exponential input**:

$$G(s) = \frac{Y(s)}{U(s)} = \mathbf{C}(\mathbf{sI} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}$$

- The transfer function represents the system dynamics in terms of the generalized frequency s instead of time t
- Analyzing the system in the complex domain uncovers interesting properties

Example

- Consider a SISO LTI ODE with state-space model:

$$\mathbf{A} = \begin{bmatrix} -a_1 & -a_2 \\ 1 & 0 \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} 1 \\ 0 \end{bmatrix}, \quad \mathbf{C} = [0 \quad 1], \quad \mathbf{D} = 0$$

- Transfer function:

$$\begin{aligned} G(s) &= \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D} = [0 \quad 1] \begin{bmatrix} s + a_1 & a_2 \\ -1 & s \end{bmatrix}^{-1} \begin{bmatrix} 1 \\ 0 \end{bmatrix} \\ &= [0 \quad 1] \frac{1}{s^2 + a_1s + a_2} \begin{bmatrix} s & -a_2 \\ 1 & s + a_1 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} \\ &= \frac{1}{s^2 + a_1s + a_2}. \end{aligned}$$

Example

- Consider a Heaviside step input:


$$u(t) = H(t) = \begin{cases} 1, & t \geq 0, \\ 0, & t < 0 \end{cases}$$

- Note that $u(t) = e^{st}$ with $s = 0$ for $t \geq 0$:

$$y(t) = \mathbf{C}e^{\mathbf{A}t} (\mathbf{x}(0) + \mathbf{A}^{-1}\mathbf{B}) + G(0)u(t)$$

- Suppose $a_1 = 1$ and $a_2 = 2$: $G(s) = \frac{1}{s^2+s+2}$

- The steady-state response as $t \rightarrow \infty$ is $G(0) = \frac{1}{2}$

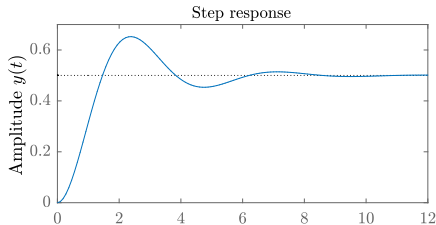

Zero Frequency Gain

- ▶ The features of the transfer function reveal important system properties
- ▶ **Zero frequency gain:** the magnitude $|G(0)|$ of the transfer function at $s = 0$
- ▶ Interpretation: the ratio of the steady-state output to a step input
- ▶ LTI ODE:

$$G(s) = \frac{b_m s^m + b_{m-1} s^{m-1} + \dots + b_0}{s^n + a_{n-1} s^{n-1} + \dots + a_0} \quad \Rightarrow \quad G(0) = \frac{b_0}{a_0}$$

- ▶ State-space model:

$$G(s) = \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D} \quad \Rightarrow \quad G(0) = -\mathbf{CA}^{-1}\mathbf{B} + \mathbf{D}$$

- ▶ Integrator: $\dot{y} = u$

$$G(s) = \frac{1}{s} \quad \Rightarrow \quad G(0) \rightarrow \infty \quad \textbf{pole}$$

- ▶ Differentiator $y = \dot{u}$

$$G(s) = s \quad \Rightarrow \quad G(0) = 0 \quad \textbf{zero}$$

Transfer Function Poles

- Consider the LTI ODE:

$$a_n \frac{d^n y}{dt^n} + a_{n-1} \frac{d^{n-1} y}{dt^{n-1}} + \dots + a_0 y = b_m \frac{d^m u}{dt^m} + b_{m-1} \frac{d^{m-1} u}{dt^{m-1}} + \dots + b_0 u$$

- The response $Y(s)$ consists of **natural response** due to the initial conditions $x(0)$ and **forced response** due to the input $U(s)$:

$$Y(s) = \underbrace{\frac{c(s)}{a(s)}}_{\text{natural response}} + \underbrace{\frac{b(s)}{a(s)} U(s)}_{\text{forced response}}$$

- The transfer function $G(s) = \frac{b(s)}{a(s)}$ and the natural response have the same denominator:

$$a(s) = a_n s^n + a_{n-1} s^{n-1} + \dots + a_0$$

- A pole p of the transfer function $G(s)$ is a solution to the characteristic equation $a(s) = 0$. If $u(t) \equiv 0$, then $y(t) = e^{pt}$ is a solution to the LTI ODE.

The poles p of a transfer function $G(s)$ correspond to the natural solutions $y(t) = e^{pt}$ of the LTI ODE called modes.

Transfer Function Zeros

- SISO LTI ODE response to an exponential input $u(t) = e^{st}$:

$$y(t) = \underbrace{\mathbf{C}e^{\mathbf{A}t} (\mathbf{x}(0) - (\mathbf{sI} - \mathbf{A})^{-1}\mathbf{B})}_{\text{transient response}} + \underbrace{(\mathbf{C}(\mathbf{sI} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}) e^{st}}_{\text{steady-state response}}$$

- A zero z of the transfer function $G(s) = \mathbf{C}(\mathbf{sI} - \mathbf{A})^{-1}\mathbf{B} + \mathbf{D}$ makes $G(z) = 0$ and hence the steady-state response to $u(t) = e^{zt}$ is zero

The zeros z of a transfer function $G(s)$ block transmission of an exponential input $u(t) = e^{zt}$.

Example: Vibration Damper




Figure: Vibrations of the mass m_1 can be damped by providing an auxiliary mass m_2 , attached to m_1 by a spring with stiffness k_2 . The parameters m_2 and k_2 are chosen so that the frequency $\sqrt{k_2/m_2}$ matches the frequency of vibration.

Example: Vibration Damper

- ▶ Vibration damper dynamics:

$$\begin{aligned}m_1 \ddot{q}_1 + c_1 \dot{q}_1 + k_1 q_1 + k_2 (q_1 - q_2) &= f \\ m_2 \ddot{q}_2 + k_2 (q_2 - q_1) &= 0\end{aligned}$$

- ▶ The Laplace transform with zero initial conditions is:

$$\begin{aligned}(m_1 s^2 + c_1 s + k_1) Q_1(s) + k_2 (Q_1(s) - Q_2(s)) &= F(s) \\ m_2 s^2 Q_2(s) + k_2 (Q_2(s) - Q_1(s)) &= 0\end{aligned}$$

- ▶ The transfer function from $F(s)$ to $Q_1(s)$ is obtained by eliminating $Q_2(s)$:

$$G(s) = \frac{Q_1(s)}{F(s)} = \frac{m_2 s^2 + k_2}{m_1 m_2 s^4 + m_2 c_1 s^3 + (m_1 k_2 + m_2 (k_1 + k_2)) s^2 + k_2 c_1 s + k_1 k_2}$$


- ▶ **Blocking property:** the transfer function has **zeros** at $s = \pm j \sqrt{k_2/m_2}$

Example: Vibration Damper


- ▶ Blocking property with parameters

$$m_1 = 1, c_1 = 1, k_1 = 1, m_2 = 1, k_2 = 1$$


- ▶ **Case 1: external input:** $u = \sin(\omega t)$, with $\omega = 1$



(a) Input $u = \sin(t)$



(b) Position of mass 1

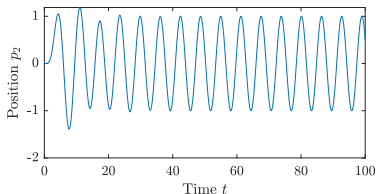


(c) Position of mass 2


Example: Vibration Damper

- Other frequency responses

- **Case 2: external input:** $u = \sin(\omega t)$, with $\omega = 1.1$




(a) Input $u = \sin(1.1t)$




(b) Position of mass 1

- **Case 3: external input:** $u = \sin(\omega t)$, with $\omega = 0.578$



(a) Input $u = \sin(1.1t)$



(b) Position of mass 1